


OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

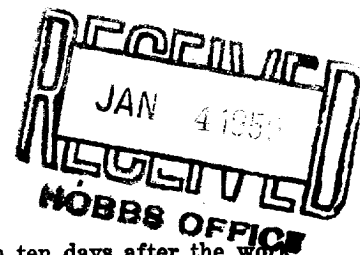

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

December 30, 1949

Hobbs, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the _____

Stanolind Oil and Gas Company D. E. Howe "A" Well No. 1 in the _____

Company or Operator

Lease

SE 1/4 of Sec. 11, T. 20, R. 38, N. M. P. M.,

House Field, Lea County.

December 26-27-28, 1949

The dates of this work were as follows: _____

Notice of intention to do the work was (~~was not~~) submitted on Form C-102 on December 28 19 49

and approval of the proposed plan was (~~was not~~) obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

On December 28, 1949, at 5:30 a.m., 48 hours had elapsed since running 4428' of 5 1/2" casing set at 4438' and cemented with 250 sacks to be used as oil string. Top of cement was located at 3200' by temperature survey.

Pipe and water shut off was tested by applying 1000 psi pressure and holding for 30 minutes before and after drilling cement plug. Pressure drop did not occur on either test. Operations were resumed.

Witnessed by T. S. Holden Stanolind Oil and Gas Company Head Rsbt.
Name Company Title

Subscribed and sworn before me this 3rd

day of January 19 50

[Signature]

Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name [Signature]

Position Production Foreman

Representing Stanolind Oil and Gas Company

Company or Operator

My commission expires 2-23-50

Address Box F, Hobbs, N.M.

Remarks:

[Signature]
Name

Title

RECEIVED
JAN 4 1950