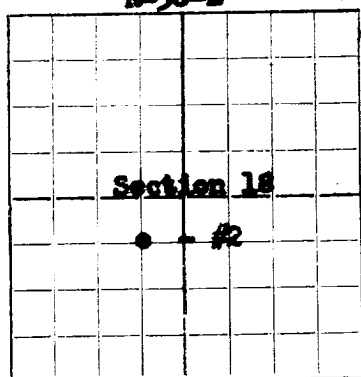


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or nearest agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Amerada Petroleum Corporation - Monument, New Mexico Fred Turner Jr. "A"
 Well No. **2** in **C/NE/4, SW/4** Sec. **18**, T. **20-S**
 R. **38-E**, N. M. P. M., **Skaggs** Field, **Lee** County.
 Well is **3300** feet south of the North line and **3300** feet west of the East line of **Section 18**
 If State land the oil and gas lease is No. _____ Assignment No. _____
 If patented land the owner is **Fred Turner, Jr.** Address _____
 If Government land the permittee is _____ Address _____
 The Lessee is **Amerada Petroleum Corporation** Address **P.O. Box 2040, Tulsa, Oklahoma**
 Drilling commenced **1/14/52** 19____ Drilling was completed **1/30/52** 19____
 Name of drilling contractor **Baker & Taylor Drilling Co.** Address **Amarilla, Texas**
 Elevation above sea level at top of casing **3549** feet.
 The information given is to be kept confidential until **Not Confidential** 19____

OIL SANDS OR ZONES

No. 1, from **3703** to **3915** No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
 No. 2, from _____ to _____ feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
9-5/8	32# & 36#	8-RT	Smls	259	Guide				
7	17#, 20# and 23#	8-RT	Smls	3688	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15"	9-5/8	275	200	Halliburton		
8-3/4	7	3703	1400	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **9'** feet to **3915'** feet, and from _____ feet to _____ feet.
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to producing **February 6, 1952** 19____
 The production of the first 24 hours was **288.72** barrels of fluid of which **98.42** % was oil; **0** % emulsion; **0** % water; and **1.58** % sediment. Gravity, Be. **32.9**
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

S. W. McAdams Driller **J. H. Hargis** Driller
E. J. Locke Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **7th**

Monument, New Mexico **February 7, 1952**
 Place Date

day of **February** 19 **52**

Name _____

Position **Assistant District Superintendent**

Representing **Amerada Petroleum Corporation**
 Company or Operator.

Notary Public

My Commission expires **8/23/55**

Address **Drawer D, Monument, New Mexico**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	6	6	Cellar
6	1404	1398	Red Bed, Shale and Sand
1404	1510	160	Anhydrite, Red Sand and Shale.
1510	2525	1015	Salt, Polyhalite and Anhydrite
2525	2650	125	Anhydrite
2650	2790	140	Red Sand and Anhydrite
2790	3480	690	Dolomite and Anhydrite
3480	3915	435	Dolomite, Anydeite and Sand
	3915		Total Depth -

GEOLOGICAL DATA

Top Anhydrite	1400
Top Salt	1511
Base Salt	2521
Top Yates	2660
Zone 1	2680
Top Minument Lime-	
stone	2808
Top Grayburg	3742

SLOPE TESTS

600'	-1/2 deg.
1300	-1/2
2280	-1/2
2572	2-
2845	2-1/4
3183	3-

No Drill Stem Tests