


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

US-112A

WELL RECORD

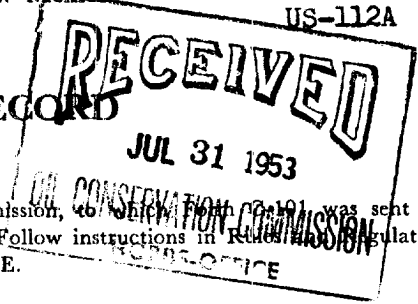

Mail to District Office, Oil Conservation Commission, to which Form C-106 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Grid for locating well. The word 'QUINTUPLICATE' is written diagonally across the grid. The number '23' is written in the second row, second column from the left.

AREA 640 ACRES
LOCATE WELL CORRECTLY

R. Olsen Oil Company & Skelly Oil Company
(Company or Operator)

Carter
(Lease)

Well No. 1, in NE 1/4 of NE 1/4, of Sec. 23, T. 20S, R. 38E, NMPM.

Wildcat Pool, Lea County.

Well is 660 feet from North line and 660 feet from East line

of Section 23-20S-38E. If State Land the Oil and Gas Lease No. is

Drilling Commenced 3-21, 1953. Drilling was Completed 6-25, 1953.

Name of Drilling Contractor: Guy Mabree Drilling Company

Address: Midland, Texas

Elevation above sea level at Top of Tubing Head 3569'. The information given is to be kept confidential until, 19.

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 7920 to 8059 feet. 138' Devonian
No. 2, from 9090 to 9340 feet. 250' McKee
No. 3, from 9500 to 9542 feet. 42' Ellenburger
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"	54#	New	289.75	HOWCO	- -	None	Surface
9-5/8"	36#	New	4246'	HOWCO	- - -	3875'-4150'	Intermediate

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17"	13-3/8"	299.75	350	HOWCO		
12-1/4"	9-5/8"	4256'	800	2-staged 400 at shoe, 400 at 2-stage tool set at 1590'		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Acidized 3875' - 4150' with 500 gals. mud acid, 4500 gals. regular acid.

Result of Production Stimulation: No results

Depth Cleaned Out:

REPORT OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 300' feet to 9543' feet, and from feet to feet.
Cable tools were used from 0' feet to 300' feet, and from feet to feet.

PRODUCTION

Put to Producing Dry, 19

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.	1555		T. Devonian		T. Ojo Alamo
T. Salt	1695		T. Silurian-Devonian	7800'	T. Kirtland-Fruitland
B. Salt	2740		T. Montoya	8600	T. Farmington
T. Yates			T. Simpson	8900	T. Pictured Cliffs
T. 7 Rivers			T. McKee	9190	T. Menefee
T. Queen			T. Ellenburger	9507	T. Point Lookout
T. Grayburg			T. Gr. Wash		T. Mancos
T. San Andres	4250		T. Granite		T. Dakota
T. Glorieta	5543		T.		T. Morrison
T. Drinkard			T.		T. Penn.
T. Tubbs	6573		T.		T.
T. Abo	7093		T.		T.
T. Penn.			T.		T.
T. Miss.			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1555	1555	Red beds, shale				
1555	1695	145	Anhydrite				
1695	2740	1045	Salt				
2740	4250	1510	Lime, dolomite, shale stringers				
4250	5553	1307	Lime, dolomite				
5553	5730	177	Sand, dolomite stringers				
5730	5770	40	Lime				
5770	6030	60	Sand, lime stringers				
6030	6633	603	Lime, dolomite, shale stringers				
6633	6633	0					
6633	7800	137	Sand, lime stringers				
6770	7800	1030	Dolomite, lime, shale				
7800	9248	448	Lime, dolomite, chert				
8248	8603	355	Lime, chert				
8603	8900	297	Shale, dolomite, chert				
8900	9120	220	Shale, sand, dolo. lime				
9120	9190	70	Green sandy shale				
9190	9470	280	Sand, shale, lime stringers				
9470	9507	37	Dolomite shale				
9507	9543	36	Cryst. dolomite & green shale, chert				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator R. Olsen Oil Company Address Drawer (2' Jal, New Mexico
Name Position or Title Geological Engineer
Date July 28, 1953