


Form 4-351a  
(Feb. 1951)

(SUBMIT IN TRIPLICATE)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

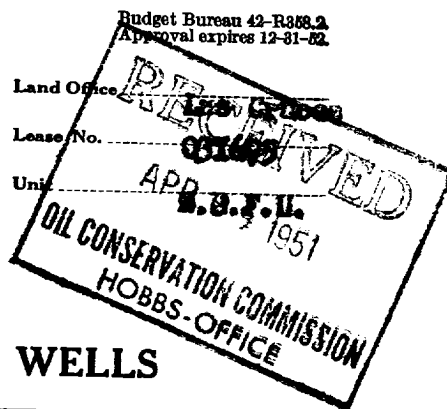

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Warren Unit E-27 No. 1 Hobbs, New Mexico April 2, 1951  
Well No. 1 is located 1980 ft. from [N] line and 660 ft. from [E] line of sec. 27  
R4/4, Sec. 27 20-S 38-S T.M.P.M.  
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Section No.)  
Hildent Las New Mexico  
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

9 5/8" casing was set at 3050', using 4 centralizers and 57 scratchers, and cemented with 1365 sacks. Total depth 3051' in line. Plug down at 3:00 P.M. 3-27-51. Top of cement behind casing 1150' by temperature survey.

On 3-29-51 after 48 hrs. WOC, tested casing with 1000# for 30 mins. Final pressure 980#. Poured top of cement in casing at 3018'. Drilled plug. Tested casing with 1000# for 30 mins. Final pressure 965#.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box CC

Hobbs, New Mexico

By [Signature]  
Asst.  
Title District Superintendent

