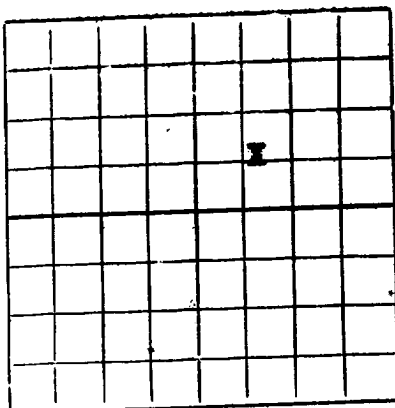


## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES  
LOCATE WELL CORRECTLY

THE BRITISH AMERICAN OIL PROD.CO. BOX 474, MIDLAND, TEXAS

HALL STATE WEN

(Company or Operator)

(Lease)

Well No. 11, in SW 1/4 of NE 1/4 11, T. 22-S, R. 35-E, NMPM.

UNDESIGNATED

Pool,

LEA

County.

Well is 1580 feet from NORTH line and 2310 feet from EAST lineof Section 11. If State Land the Oil and Gas Lease No. is STATE E-8244Drilling Commenced 5-2-1958, 19..... Drilling was Completed 6-1-1958, 19.....Name of Drilling Contractor J.C. Grain Drilling CompanyAddress 528 Wilson Bldg., Dallas 1, TexasElevation above sea level at Top of Tubing Head 3627. The information given is to be kept confidential untilNot confidential, 19.....

## OIL SANDS OR ZONES

No. 1, from 3876-4030 Not penetrated (Yates Sand) No. 4, from.....to.....

No. 2, from.....to..... No. 5, from.....to.....

No. 3, from.....to..... No. 6, from.....to.....

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None indicated to.....feet.

No. 2, from.....to.....feet.

No. 3, from.....to.....feet.

No. 4, from.....to.....feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8"OD	22.7	NEW	320.33	Tex. Pat.			Surface Casing
5 1/2"OD	14.0	NEW	1043.26	Haker		See Below	Oil String

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4"	8 5/8"	335.41	200	Halliburton		
7 7/8"	5 1/2"	1029	303	Halliburton		

## RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

40,000 lbs sand and 40,000 gallons oil used to sand-oil frac.Result of Production Stimulation After rec. of frac oil well produced:219.77 B.O. and no water. Flowing thru 2" EUE tubing and 2 1/4" chole,  
24 hours, Tub. Press 150/400 Casing Press. Depth Cleaned Out.....

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 4030 feet, and from feet to feet.  
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 6-12-1958, 19 After recovering 952.1 bbls frac oil

OIL WELL: The production during the first 24 hours was 219.77 barrels of liquid of which 100% was oil; 0% was emulsion; 0% water; and 0% was sediment. A.P.I. Gravity. 35.5

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian.	T. Ojo Alamo.
T. Salt.	T. Silurian.	T. Kirtland-Fruitland.
B. Salt.	T. Montoya.	T. Farmington.
T. Yates. 3876-4030 Not penetrated	T. Simpson.	T. Pictured Cliffs.
T. 7 Rivers.	T. McKee.	T. Menefee.
T. Queen.	T. Ellenburger.	T. Point Lookout.
T. Grayburg.	T. Gr. Wash.	T. Mancos.
T. San Andres.	T. Granite.	T. Dakota.
T. Glorieta.	T.	T. Morrison.
T. Drinkard.	T.	T. Penn.
T. Tubbs.	T.	T.
T. Abo.	T.	T.
T. Penn.	T.	T.
T. Miss.	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	337	337	Surface sand and red bed.				
337	1575	1238	Red bed				
1575	1761	186	Red bed and sand				
1761	1880	119	Red bed				
1880	2017	137	Anhydrite				
2017	2047	30	Salt and shells				
2047	3038	991	Anhydrite and salt				
3038	3177	139	Salt, anhydrite and gyp				
3177	3409	232	Anhydrite and salt				
3409	3462	53	Anhydrite and gyp				
3462	3588	126	Anhydrite and salt				
3588	3688	100	Anhydrite and gyp				
3688	3765	77	Anhydrite				
3765	3876	111	Anhydrite gyp and lime.				
3876	4030	154	Yates sand.				
		4030					

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Midland, Texas (Date)

Company or Operator The British American Oil Prod. Co. Address Box 474, Midland, Texas  
Name. Vernon B. French Dist. Clerk