

MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

Place

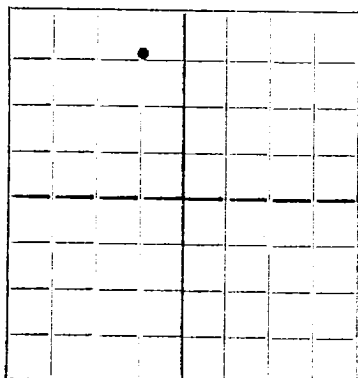
5/26/37

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

Tide Water Associated Oil Company. J.M. Day Well No. 1 in NE of NW 1/4of Sec. 6, T. 22, R. 36, N. M. P. M., South Eunice Field, Lea County.
N.AREA 640 ACRES
LOCATE WELL CORRECTLYThe well is 660 feet xx [S.] of the North line and 1980 feet
[E.] xx of the West line of Section 6-22-36

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is _____

Address _____

If government land the permittee is _____

Address _____

The lessee is Tide Water Associated Oil CompanyAddress Box 731-Tulsa, OklaWe propose to drill well with drilling equipment as follows: Rotary

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission

is as follows: Tide Water carries blanket bond of \$10,000 W/Unites States Fidelity and Gauranty Co. as Security

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
15"	10-3/4" OD	40	SH	300	Cemented	175 To Surface
9-7/8"	7-5/8" OD	26.40	New	3200	"	800
6-3/4"	5 1/2" OD	17	New	3750	"	175

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3750 feet.

Additional Information: 10-3/4" Casing will be cemented with sufficient cement to cement back to surface. 7-5/8" OD Casing will be set through salt formation and will be cemented at least 10' above bottom of 10 1/2" OD casing. 5 1/2" OD will be cemented with 150% of the calculated amount of cement to cement back to bottom of 7-5/8" OD Casing.

MAY 27 1937

Approved _____ 19____
except as follows:

Sincerely yours.

Tide Water Associated Oil Company

Company or Operator

By F. Schneider - J.S.Position Prod. Sup't.

Send communication regarding well to

Name F. SchneiderAddress Drawer KK Hobbs, New Mexico

OIL CONSERVATION COMMISSION

By _____

Title _____