

lcc- Mr. FHR  
" JTR  
fNEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON REPAIRING WELL	<b>XX</b>
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

Dec. 3, 1954  
(Date)Hobbs, N. Mex.  
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil & Gas Company  
(Company of Operator)State 157 "B"  
(Lease)Mobile, Inc.  
(Contractor)

Well No. 1 in the NE 1/4 NW 1/4 of Sec. 7

T. 22S, R. 36E, NMPM, Pool, South Eunice - Lea County.

The Dates of this work were as follows: 6/15/54 to 8/11/54

Notice of intention to do the work (~~yes~~) (was not) submitted on Form C-102 on \_\_\_\_\_, 19\_\_\_\_,  
(Cross out incorrect words)and approval of the proposed plan (~~yes~~) (was not) obtained.

## TD 3830- 7" ODCsg @ 3740 DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Well Now producing all water- Attempt to shut off water & Fracture for oil Production.  
After 10 attempted squeeze jobs- unable to shut off bottom hole water.  
Perforated 7" OD Casing from 3742 to 3747' w/ 3-3/4" Holes per Ft. (15) and acidized w/  
1000 Gal. Reg. acid & 3000 Gal. Regular Acid- developed 100' sulphur water in hole and could not  
lower, swabbing 24 hours. Also, 6000 Gal. oil & 9000# Sand- developed water.  
Perforated casing from 3430-50; 3470-78; 3496-3526; 3540-3568; 3610-3626 & 3632-3638 w/- 2- Jet  
shots per foot and acidized w/ 1000 Gal. Mud and 3000 Gal. Reg. acid to develop Gas Production  
in Yates Sand.


Swab 1 Gal. oil per Hr. no water-

Well shut in- Under Observation

Witnessed by J. J. Right Jr.  
(Name)Sinclair Oil & Gas Co.,  
(Company)Foreman  
(Title)

Approved:

OIL CONSERVATION COMMISSION

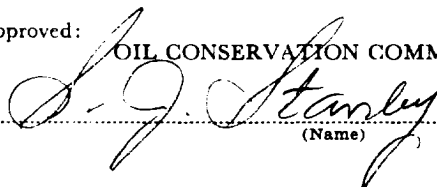

(Name)

(Title)

(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name

Position Dist. Supt.

Representing Sinclair Oil &amp; Gas Co.,

Address 52 Broadway, Hobbs, N.M.