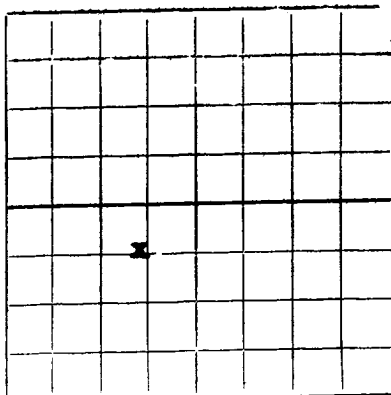


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

101 SEP 17 AM 7:15
WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Texas Pacific Coal and Oil Company N.M. State "A" A/c 2
(Company or Operator) (Lease)

Well No. 37, in NE 1/4 of SW 1/4 of Sec. 8, T. 22-S, R. 36-E, NMPM.

South Eunice Pool, Lea County.

Well is 1980' feet from South line and 1980 feet from West line

of Section 8. If State Land the Oil and Gas Lease No. is A-983

Drilling Commenced November 12, 1946 Drilling was Completed December 21, 1946

Name of Drilling Contractor Corbett Drilling Company

Address

Elevation above sea level at Top of Tubing Head 3600' The information given is to be kept confidential until
19

OIL SANDS OR ZONES

No. 1, from 3200' to 3230' No. 4, from 3640' to 3660'

No. 2, from 3255' to 3285' No. 5, from 3670' to 3684'

No. 3, from 3605' to 3630' No. 6, from 3715' to 3799'

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
15 1/2"	70#	New	196'				
10 3/4"	40.5#	New	1478'				
5 1/2"	14#	New	3802'			See Attached Sheet	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	15 1/2"	205'	350			
13 3/4"	10 3/4"	1492'	800			
8 3/4"	5 1/2"	3812'	200			

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

See attached sheet

Result of Production Stimulation

Depth Cleaned Out

B D OF DRILL-STEM AND SPECIAL TEST

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3912 feet, and from _____ feet to _____ feet.
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing February 9, 1947 (after plug back)

OIL WELL: The production during the first 24 hours was _____ barrels of liquid of which _____ % was
 was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I.
 Gravity _____

GAS WELL: The production during the first 24 hours was 5690 M.C.F. plus _____ barrels of
 liquid Hydrocarbon. Shut in Pressure 1060 lbs.

Length of Time Shut in 24 hours

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

T. Anhy. 1390'
 T. Salt. _____
 B. Salt. 3040'
 T. Yates. 3195'
 T. 7 Rivers. 3396'
 T. Queen. 3800'
 T. Grayburg _____
 T. San Andres _____
 T. Glorieta _____
 T. Drinkard _____
 T. Tubbs _____
 T. Abo _____
 T. Penn _____
 T. Miss _____

T. Devonian _____
 T. Silurian _____
 T. Montoya _____
 T. Simpson _____
 T. McKee _____
 T. Ellenburger _____
 T. Gr. Wash _____
 T. Granite _____
 T. _____
 T. _____
 T. _____
 T. _____
 T. _____
 T. _____

Northwestern New Mexico

T. Ojo Alamo _____
 T. Kirtland-Fruitland _____
 T. Farmington _____
 T. Pictured Cliffs _____
 T. Menefee _____
 T. Point Lookout _____
 T. Mancos _____
 T. Dakota _____
 T. Morrison _____
 T. Penn _____
 T. _____
 T. _____
 T. _____

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	36	36	Caliche	2773	2780	7	Salt
36	77	41	Shale, sand & shells	2780	2961	181	Anhydrite
77	170	93	Sand & shells	2961	3010	59	Anhydrite & salt
170	208	38	Sand, shells & red bed	3010	3059	49	Anhydrite
208	375	167	Red bed & shale	3059	3070	11	Anhydrite & sand
375	470	95	Red rock & shale	3070	3085	15	Anhydrite
470	678	208	Shale & sand	3085	3878	793	Lime
678	760	82	Sand & shells	3878	3901	23	Lime & sand
760	860	100	Shale & shells	3901	3912	11	Lime
860	900	40	Sand & Shale				
900	975	75	Sand & Shells				
975	1080	105	Shale & shells				
1080	1135	55	Red rock & shale				
1135	1176	41	Sand & shell				
1176	1245	69	Anhydrite & shells				
1245	1323	78	Red rock & shale				
1323	1328	5	Anhydrite				
1328	1380	52	Red rock & Anhydrite				
1380	1508	128	Red bed & Anhydrite				
1508	1510	2	Anhydrite				
1510	1945	435	Sand, shale & salt				
1945	2250	295	Salt, Anhydrite & shells				
2250	2535	285	Salt & Anhydrite				
2535	2742	207	Salt, Anhydrite & gyp				
2742	2762	20	Salt & Anhydrite				
2762	2773	11	Anhydrite				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

September 15, 1954

(Date)

Company or Operator Texas Pacific Coal and Oil Co.

Address Box 1688 Hobbs, New Mexico

Name John Yironka

Position or Title District Engineer