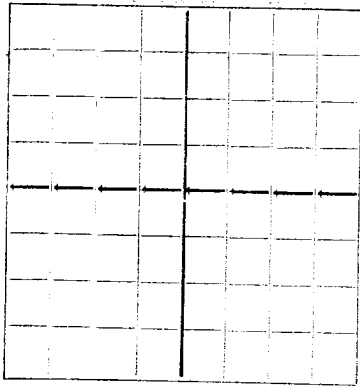



N.

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

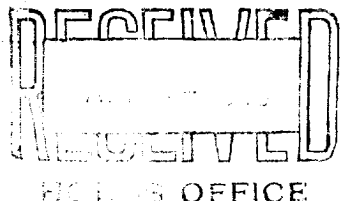

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

The Ohio Oil Company

Box 1607, Hobbs, New Mexico

Company or Operator

State McDonald

Well No.

16

SE/4 NE/4

13

Address

22 South

Lease

R. 36 East

South Eunice

Field

Lea

County

Well is 1650 feet south of the North line and 2310 feet west of the East line of Section 13

If State land the oil and gas lease is No. A-2614 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced March 12 1940 Drilling was completed March 30 1940

Name of drilling contractor Noble Drilling Corp. Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3495 feet

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3665 to 3790 (Pay) No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
7"	24#	10		312	Common			
4 1/2"	9.5#	8		3622	Float			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
	7"	312	100	Halliburton	10	40
	4 1/2"	3622	300	Halliburton	10	40

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3790 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing April 1 1940

The production of the first 24 hours was 90 barrels of fluid of which 100 % was oil; 0 %

emulsion; 0 % water; and 0 % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

NOBLE DRILLING CORPORATION

S. N. Poteet

Driller M. J. Winters

Driller

Red Davis

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 5th

day of April 1940

Notary Public

My Commission expires March 2, 1941

Name

Position Superintendent

Representing THE OHIO OIL COMPANY

Company or Operator

Address Box 1607, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	15	15	Cellar
15	42	27	Caliche and Sand
42	200	158	Sand
200	810	610	Red Beds
810	1295	485	Red Rock
1295	1388	93	Anhydrite
1388	1515	127	Salt & Anhydrite & Shells
1515	1825	310	Salt & Shells
1825	2086	261	Salt & Anhydrite & Shells
2086	2345	257	Salt & Anhydrite
2345	2460	115	Salt & Anhydrite & Potash
2460	2549	89	Salt & Anhydrite
2549	2580	31	Anhydrite
2580	2708	128	Anhydrite & Gypsum
2708	2786	78	Anhydrite & Broken Lime
2786	2852	66	Anhydrite & Broken Lime & Gypsum
2852	2914	162	Lime & Anhydrite
2914	2960	46	Lime
2960	3048	88	Lime & Anhydrite
3048	3061	13	Brown Lime
3061	3150	89	Lime
3150	3185	35	Lime & Anhydrite
3185	3370	195	Lime
3370	3405	35	Lime & Anhydrite
3405	3790	385	Lime