

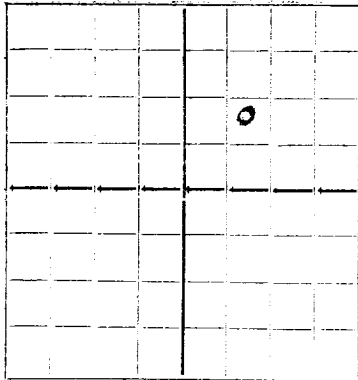
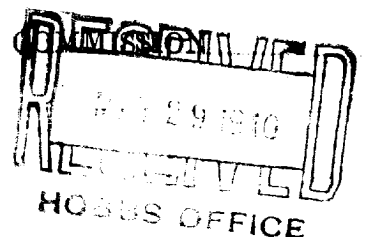
N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE

## WELL RECORD


 AREA 640 ACRES  
 LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

The Ohio Oil Company

Hobbs, New Mexico

Company or Operator

Address

State McDonald

Well No.

18

in

SW

NE

of Sec.

13

T.

22 S

Lease

R. 36 E

N. M. P. M.

South Bunice

Field.

Lea

County.

Well is 1650 feet south of the North line and 1650 feet west of the East line of Sec. 13

If State land the oil and gas lease is No. A-2614 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced April 30 1940 Drilling was completed May 25, 1940 19

Name of drilling contractor Noble Drilling Corporation Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3480 feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 3721 to 3775 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 5/8	29.35	8		316	Reg			
4 1/2	9.50	8		3642	Float			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8 5/8	316	150	Halliburton	10	40
6 3/4	4 1/2	3642	300	Halliburton	10	40

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 3775 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing June 1, 1940 19

The production of the first 24 hours was 192 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

Noble Drilling Company

## EMPLOYEES

H. J. Winters Driller S. W. Potest Driller

Robt D. Haley Driller Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 27

day of May 1940

Notary Public

My Commission expires March 2, 1941

Hobbs, New Mexico May 27, 1940

Name Ed Province

Position Foreman

Representing The Ohio Oil Company

Address Hobbs, New Mexico

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	16	16	Cellar
16	205	189	Sand & Caliche
205	725	520	Red bed
725	1210	485	Red Rock
1210	1305	95	Anhydrite
1305	1660	355	Salt-anhydrite
1660	1833	173	Salt-anhydrite-shells
1833	2157	324	Salt-anhydrite
2157	2233	76	Anhydrite-salt breaks
2233	2497	263	Salt-anhydrite
2497	2830	333	Anhydrite-gyp
2830	2867	37	Anhydrite-gyp-lime
2867	2989	122	Lime-anhydrite
2989	3032	43	Lime
3032	3113	81	Lime-gyp
3113	3155	22	Lime
3155	3431	296	Lime-gyp
3431	3775	344	Lime