

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPL
(Other instructions
verse side)

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

5. LEASE DESIGNATION AND SERIAL NO.

465 030132 (a)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

40 AM '69

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Closson A

9. WELL NO.

#5

10. FIELD AND POOL, OR WILDCAT

South Eunice

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

18-22S-36E

12. COUNTY OR PARISH 13. STATE

Lea

N.M.

1. OIL WELL ☒ GAS WELL ☐ OTHER

2. NAME OF OPERATOR

Cities Service Oil Company

3. ADDRESS OF OPERATOR

% Hobbs Pipe & Supply Co., Box 2010 Hobbs, N.M.

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

G 1980' from the north line and 1980' from the east.

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, OR, etc.)

3597

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1. Propose to spot a 25 sack cement plug at 3835'. 3660-3780
2. Propose to spot a 25 sack cement plug at 3200', stub of 5 1/2".
3. Propose to spot a 25 sack cement plug at 1000', stub of 8 5/8".
4. Propose to spot a 25 sack cement plug at 186', shoe of 13 3/8".
5. Propose to spot a 10 sack cement plug at surface with marker.
6. Hole will be loaded with mud laden fluid.

AMENDMENT: Place 25 sack cement plug at 1650 feet if
8-5/8" casing is pulled below this depth.

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Agent

DATE


12-16-69

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITIONS OF APPROVAL, IF ANY:

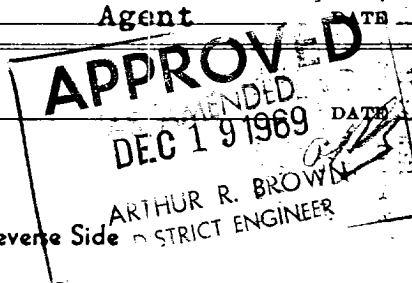

*See Instructions on Reverse Side