

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Geology, Minerals and Natural Resources Department.

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
310 Old Santa Fe Trail, Room 206
Santa Fe, New Mexico 87503

WELL API NO. 30-025-08975
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name South Eunice Unit
8. Well No. #17
9. Pool name or Wildcat Eunice 7Rvrs-Qn, So.

10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3540' GR
--

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER
2. Name of Operator Conoco, Inc.
3. Address of Operator 10 Desta Dr. Ste. 100W, Midland, TX
4. Well Location Unit Letter L : 1980 Feet From The South Line and 660 Feet From The West Line Section 21 Township 22S Range 36E NMPM Lea County

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	
OTHER: <input type="checkbox"/>	

SUBSEQUENT REPORT OF:

REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
COMMENCE DRILLING OPNS. <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
CASING TEST AND CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>	

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

1. Pull packer from 3565'.
2. Set a C.I.B.P. at 3565' with 35' of cement on top.
3. Circulate hole with gelled brine mud.
4. Spot 25 sxs cement plug 1300'-1550'.
5. Spot 25 sxs cement plug 550'-800'.
6. Perforate the 5 1/2" casing at 470'. Squeeze 30 sxs cement thru perfs leaving 100' of cement inside of casing. Tag top of cement.
7. Spot 10 sxs cement surface plug.
8. Install dryhole marker and clear location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Reese Wilkes TITLE Sr. Staff Reg. Asst. DATE 12-6-99

TYPE OR PRINT NAME

TELEPHONE NO.

(This space for State Use)

APPROVED BY _____ TITLE _____ DATE _____


CONDITIONS OF APPROVAL, IF ANY:

Distrib: OCD (3), SHEAR, POWCA, Cost Asst, Well File

CURRENT WELLBORE

11/15/99

Elev. = 3540' G.L. K.B.=+12'

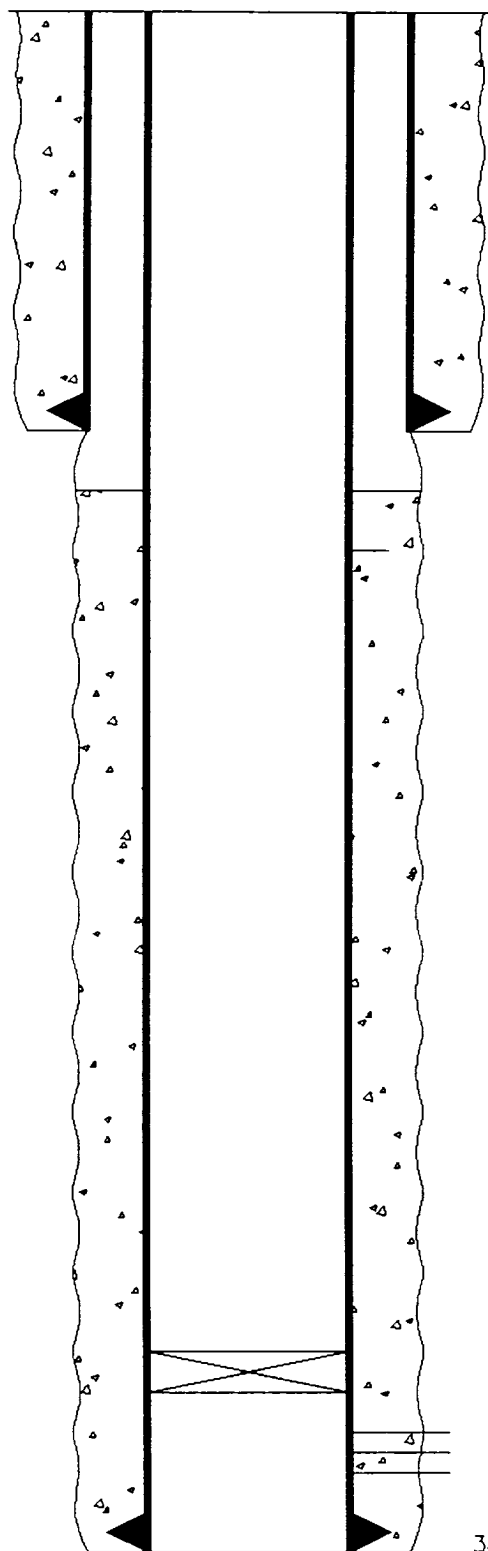

420' - 8 5/8" Casing. Cemented w/325 sxs. Circulated to Surface

T.O.C. @ 575' (Temp. Survey)

Hole in casing @ 636'

R.B.P. @ 3565'

Perfs 3615'-3644' sqz'd

Perfs 3615'-3818'

3825' - 5 1/2", 14# Casing. Cemented w/950 sxs

T.D. @ 3825'

CONOCO, INC.

South Eunice Unit #17

1980' FSL & 660' FWL


Sec. 21, T-22S, R-36E

Lea County, NM

CURRENT WELLBORE

11/15/99

Elev. = 3540' G.L. K.B.=+12'

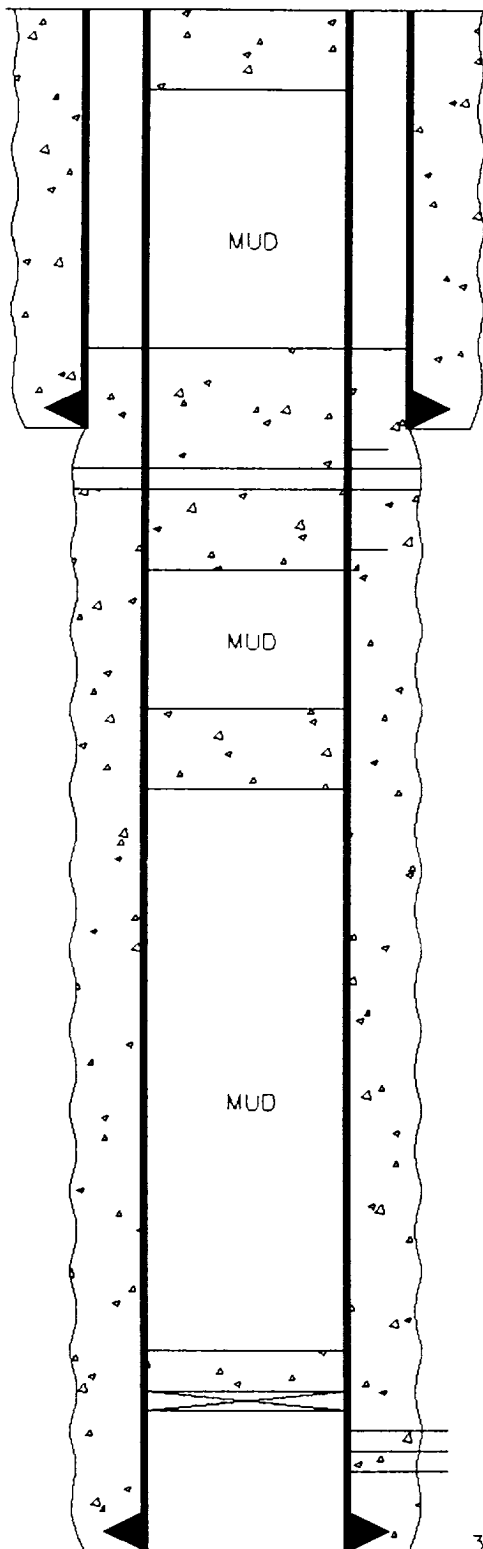

SPOT 10 SXS CEMENT SURFACE PLUG

SQUEEZE 30 SXS CEMENT THRU PERFS @ 470'

420' - 8 5/8" Casing. Cemented w/325 sxs. Circulated to Surface
PERFORATE 5 1/2" CSG. @ 470'
T.O.C. @ 575' (Temp. Survey)

Hole in casing @ 636'

SPOT 25 SXS CEMENT PLUG 550'-800'

SPOT 25 SXS CEMENT PLUG 1300'-1550'

C.I.B.P. @ 3565' WITH 35' CEMENT ON TOP
Perfs 3615'-3644' sqz'd
Perfs 3615'-3818'

3825' - 5 1/2", 14# Casing. Cemented w/950 sxs

T.D. @ 3825'

CONOCO, INC.
South Eunice Unit #17
1980' FSL & 660' FWL
Sec. 21, T-22S, R-36E
Lea County, NM