



POOL COMPANY TEXAS Ltd.

5208 Lovington Highway (88240)
P.O. Box 2545
Hobbs, New Mexico 88241

An affiliate of
Pool Energy Services Co.

Tel: 505/392-6591
Fax: 505/392-3100

9350 60

973

981

CONOCO, INC.
SEMU Eumont No. 93

- 3/16/98 Move in, hold safety meeting, rig up, put on BOP, ran tubing to 3500', tag cast iron bridge plug, shut down.
- 3/17/98 Circulate mud, test casing, did not hold, pull tubing, run 5½ packer, had hole in casing from 378' - 441', pull packer out, run tubing to 3500', spot 10 sacks cement from 3500' - 3410', pull tubing to 3150', spot 25 sacks from 3150' - 2910', pull tubing to 1300', spot 25 sacks from 1300' - 1060', pull tubing to 500', pump 150 sacks from 500' to surface in 5½ from 441 to surface in 8 5/8.
- 3/18/98 Cut off wellhead, put in marker, move off.


Class "C" Cement
Mud - 25lb. Salt Gel per bbl.

OK - by Steve Cathey - BLM

CURRENT WELLBORE

11/18/97

Elev. = 3534' GL +10' KB

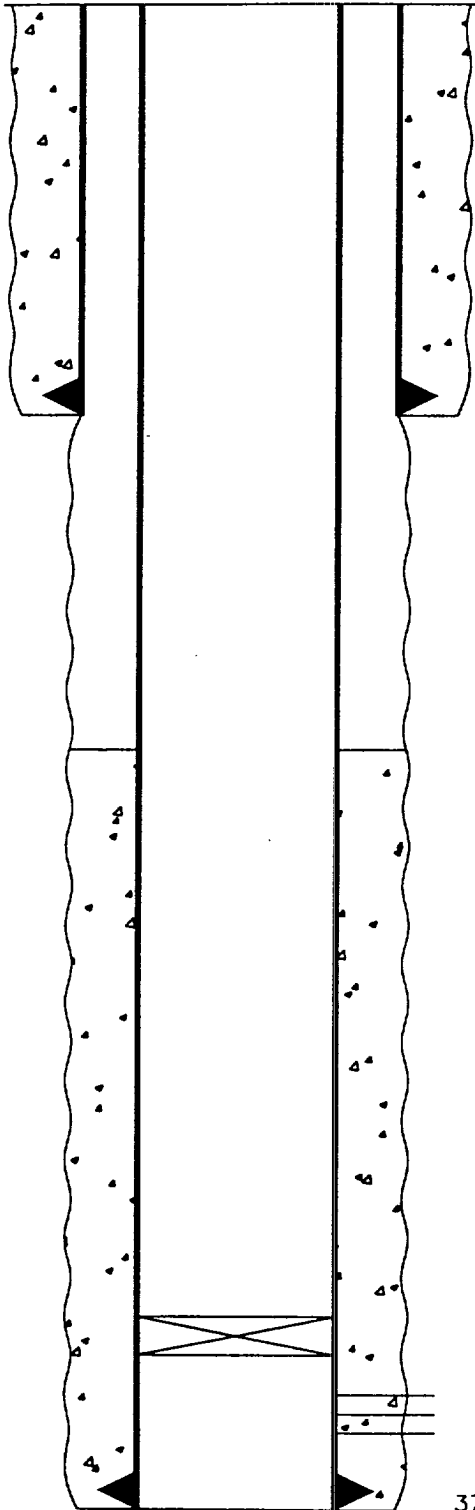

411' - 8 5/8" Casing. Cemented, w/210 sxs. Circulated to Surface

T.O.C. @ 3100'

C.I.B.P. @ 3500'

Perfs 3568'--3712'

3775' - 5 1/2", 14#, Casing. Cemented w/235 sxs

T.D. @ 3775'

CONOCO, INC.

SEMU Eumont #93

660' FNL & 1980' FEL


Sec. 23, T-20S, R-37E

Lea County, NM

PROPOSED PLUG AND ABANDONMENT

11/18/97

Elev. = 3534' GL +10' KB

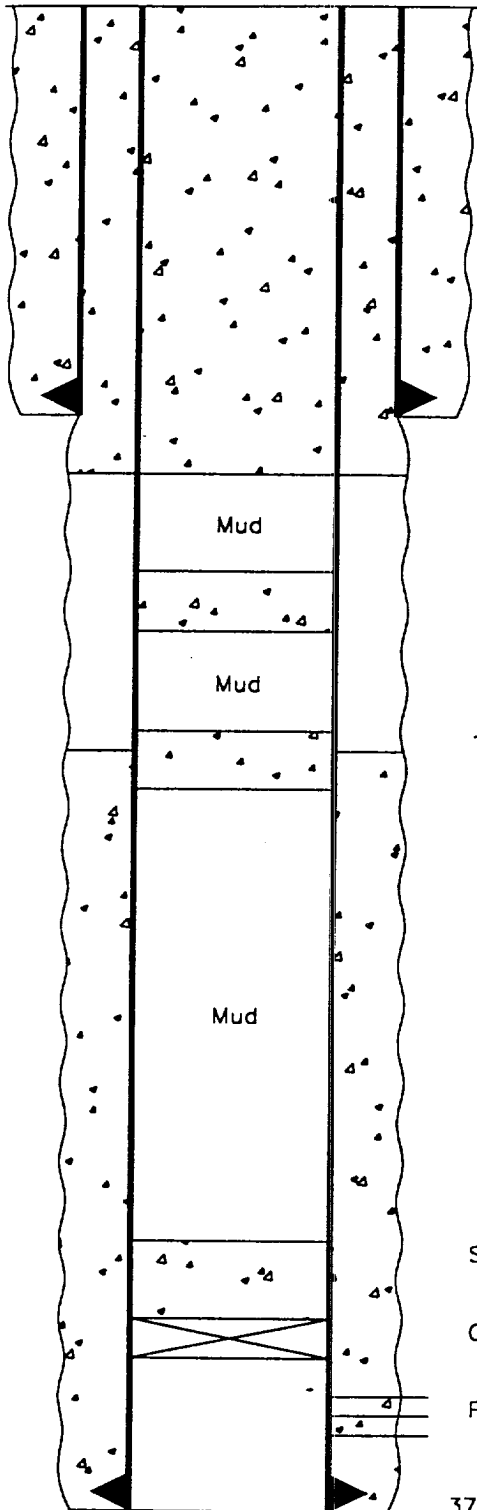

411' - 8 5/8" Casing. Cemented, w/210 sxs. Circulated to Surface

Perforate 5 1/2" Casing @ 470'
Circulate 130 sxs Cement to Surface

Spot 25 sxs Cement 1060'-1300'

T.O.C. @ 3100'

Spot 25 sxs Cement 2910'-3150'

Spot 35' Cement on top of C.I.B.P.

C.I.B.P. @ 3500'

Perfs 3568'-3712'

3775' - 5 1/2", 14#, Casing. Cemented w/235 sxs

T.D. @ 3775'

CONOCO, INC.
SEMU Eumont #93
660' FNL & 1980' FEL
Sec. 23, T-20S, R-37E
Lea County, NM