



..... OPTIONAL EQUIPMENT

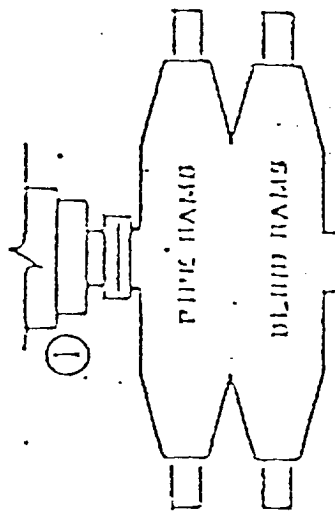


- 2. HAM-TYPE HOSE, 10,000 LB WP
- 3. 1/16" 10,000 LB WP 6 BX
- 4. DOWEL PIN, 10,000 LB WP
- 5. STEEL TEE, 3/16" X 2 1/16" 10,000 LB WP 6 BX
- 6. 2 1/16" 10,000 LB WP 6 BX
- 7. HOSE PRESSURE GAUGE
- 8. STEEL CHOCK, 3/16" X 2 1/16" 10,000 LB WP 6 BX
- 9. ADJ. CHOCK 2 1/16" 10,000 LB WP
- 10. 2 1/16 ADJ. CHOCK OR 2 1/16 VALVE ON SIDE OUTLET OF 2 1/16 STEEL TEE, ALL 10,000 LB WP
- 11. ADAPTED 2 1/16 X FLANGE INLET OF 12, 10,000 LB WP
- 12. 10,000 LB WP PERMUTE CHOCK
- 13. HYDRAULIC CHOCK, 2500 LB WP OR BETTER
- 14. CHECK VALVE, 3/16" 10,000 LB WP 6 BX

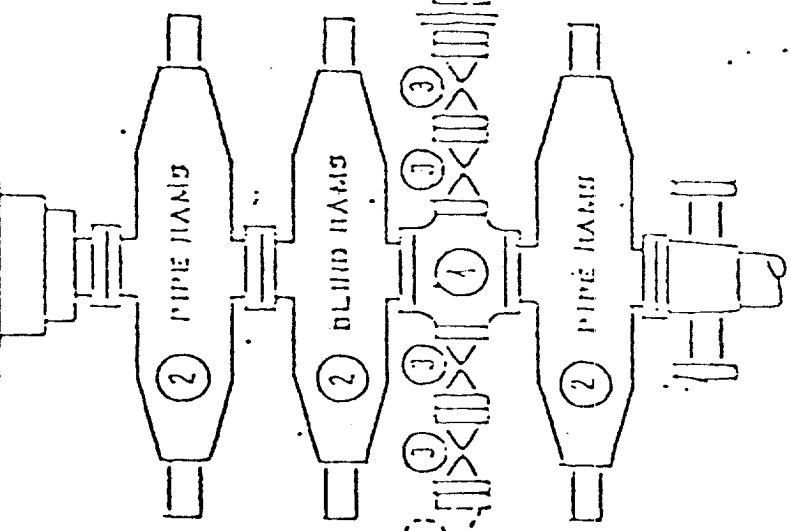


- 1. HAM-TYPE HOSE, 10,000 LB WP
- 2. 1/16" 10,000 LB WP 6 BX
- 3. DOWEL PIN, 10,000 LB WP
- 4. STEEL TEE, 3/16" X 2 1/16" 10,000 LB WP 6 BX
- 5. 2 1/16" 10,000 LB WP 6 BX
- 6. 2 1/16" 10,000 LB WP 6 BX
- 7. HOSE PRESSURE GAUGE
- 8. STEEL CHOCK, 3/16" X 2 1/16" 10,000 LB WP 6 BX
- 9. ADJ. CHOCK 2 1/16" 10,000 LB WP
- 10. 2 1/16 ADJ. CHOCK OR 2 1/16 VALVE ON SIDE OUTLET OF 2 1/16 STEEL TEE, ALL 10,000 LB WP
- 11. ADAPTED 2 1/16 X FLANGE INLET OF 12, 10,000 LB WP
- 12. 10,000 LB WP PERMUTE CHOCK
- 13. HYDRAULIC CHOCK, 2500 LB WP OR BETTER
- 14. CHECK VALVE, 3/16" 10,000 LB WP 6 BX


CHOCK OPTION "A"

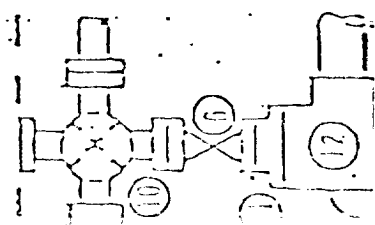

CHOCK OPTION "B"

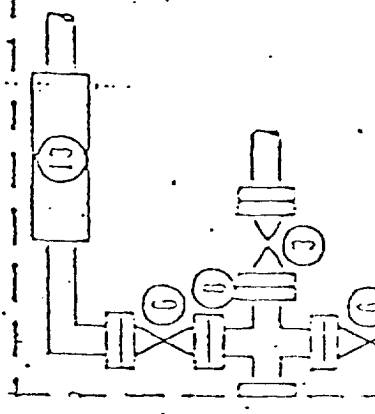

CHOCK OPTION "C"

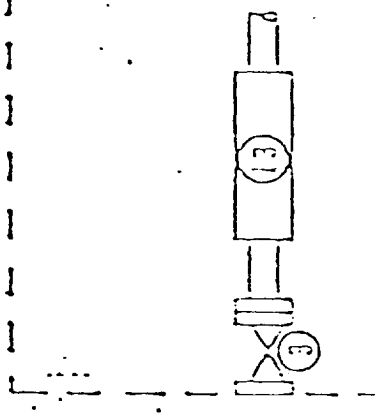

NOTES:

1. 10,000 PSI WP OR BETTER CLAMP MUST BE SUBSTITUTED FOR FLANGED
2. ONE ADJUSTABLE CHOCK MAY BE REPLACED WITH A POSITIVE CHOCK
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE TOP MUST BE CAPABLE OF BEING OPENED / CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

10,000 PSI WORKING PRESSURE  
BLOWOUT PREVENTER HOSE

RECEIVED

MAR 15 1952

O.C.D.  
HOBBS OFFICE

FILE