


CONOCO INC.

Blow-out Preventer Specifications

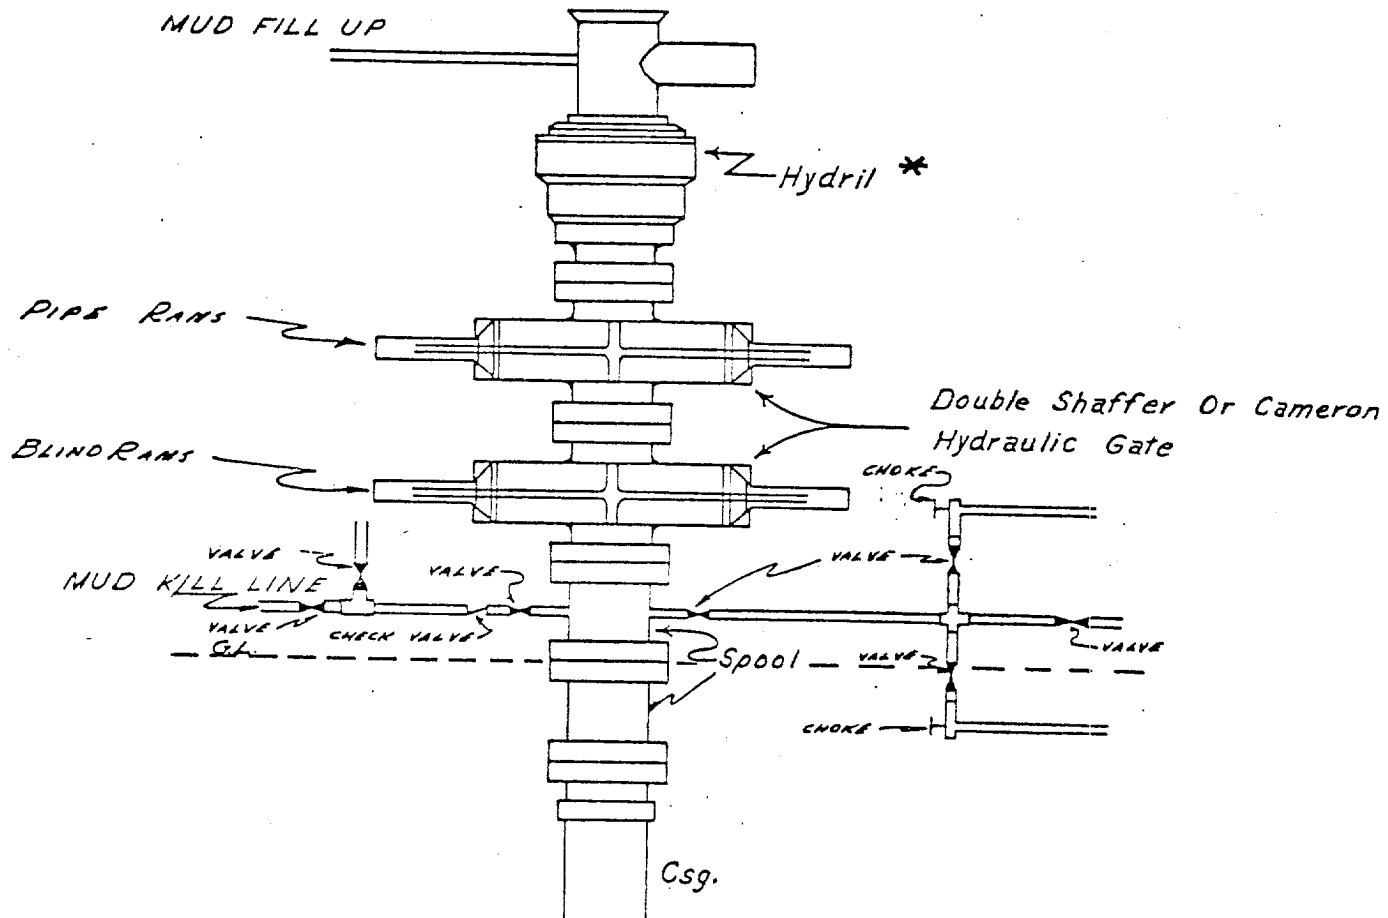

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

*

DUE TO SUBSTRUCTURE CLEARANCE, HYDRIL
MAY OR MAY NOT BE USED.

11-14-88
U.S. District Court
District of Columbia

117

RECEIVED
AUG 16 1984
O.C.D.
HOBBS OFFICE