


HOBBS DIVISION

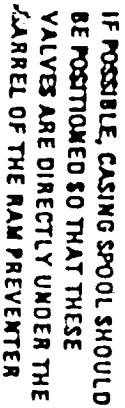

The blowout preventer shall be equipped with a seal and a seal set of drill pipe seal bits and seal liners. The seal preventors may be two singles or a double type. Seal preventors shall be installed on the side of the casing, then they may be used for connecting on location at all times for all liners used. Seal preventors shall be installed on the seal location at all times for all liners used. Seal preventors shall be installed on the seal location at all times for all liners used. Seal preventors shall be installed on the seal location at all times for all liners used.

RECEIVED
AUG 30 1985
HOUSE

RECEIVED
AUG 30 1985
HOUSE