

Submit to Appropriate
 District Office
 State Lease-6 copies
 Fee Lease-5 copies

State of New Mexico
 Energy, Minerals and Natural Resources Department

Form C-101
 Revised 1-1-89

OIL CONSERVATION DIVISION

P.O. Box 2088
 Santa Fe, New Mexico 87504-2088

DISTRICT I
 P.O. Box 1980, Hobbs, NM 88240
DISTRICT II
 P.O. Drawer Dd, Artesia, NM 88210
DISTRICT III
 1000 Rio Brazos Rd., Aztec, Nm 87410

API NO. (assigned by OCD on New Wells) 30-025-31534	
6. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	
8. State Oil & Gas Lease No. N/A	
7. Lease Name or Unit Agreement Name ARROWHEAD GRAYBURG UNIT	
8. Well No. 211	
9. Pool name or Wildcat ARROWHEAD/GB	

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OF PLUG BACK					
1a. Type of Work: DRILL <input checked="" type="checkbox"/> RE-ENTER <input type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/>					
b. Type of Well: OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER WELL <input type="checkbox"/> SINGLE ZONE <input type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/>					
2. Name of Operator CHEVRON U.S.A. INC.			B. Well No. 211		
3. Address of Operator P.O. BOX 1150, MIDLAND, TX 79702 ATTN: P.R. MATTHEWS			9. Pool name or Wildcat ARROWHEAD/GB		
4. Well Location Unit Letter <u>P</u> : <u>330</u> Feet From The <u>SOUTH</u> Line and <u>420</u> Feet From The <u>EAST</u> Line Section <u>12</u> Township <u>22S</u> Range <u>36E</u> NMPM <u>LEA</u> County					
10. Proposed depth 4500'		11. Formation GRAYBURG		12. Rotary or C.T. ROTARY	
13. Elevation (Show DF,RT, GR, etc.) 3442 GE		14. Kind & Status Plug Bond BLANKET		15. Drig Contractor UNKNOWN	
16. Date Work will start ASAP					
17. PROPOSED CASING AND CEMENT PROGRAM					
SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
12 1/4"	8 5/8"	23#	1350	800	SURFACE
7 7/8"	5 1/2"	15.5#	4500	1200	SURFACE

MUD PROGRAM: 0'-1350' FRESH WATER SPUD MUD, 9.0 PPG
 1350'-4500' BRINE WATER AND STARCH MUD SYSTEM, 10.0 PPG.

BOPE EQUIPMENT: 2000 PSI WORKING PRESSURE, SEE ATTACHED
 CHEVRON U.S.A. CLASS II DRAWING.

IN ABOVE SPACE DESCRIBE PROPOSED PROG IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE P.R. Matthew TITLE TECHNICAL ASSISTANT DATE '03-13-92

TYPE OR PRINT NAME P.R. MATTHEWS TELEPHONE NO. (915)687-7812

APPROVED BY JERRY SEXTON DISTRICT I SUPERVISOR TITLE _____ DATE MAR 16

CONDITIONS OF APPROVAL, IF ANY:

Permit Expires 6 Months From Approval
 Date Unless Drilling Underway.

RECEIVED


MAR 16 1992

300 HOBBS OFFICE

CHEVRON DRILLING REFERENCE SERIES
VOLUME ELEVEN
WELL CONTROL AND BLOWOUT PREVENTION

D. CLASS II-B BLOWOUT PREVENTER STACK:

Figure 11J.3
Class II-B Blowout Preventer Stack

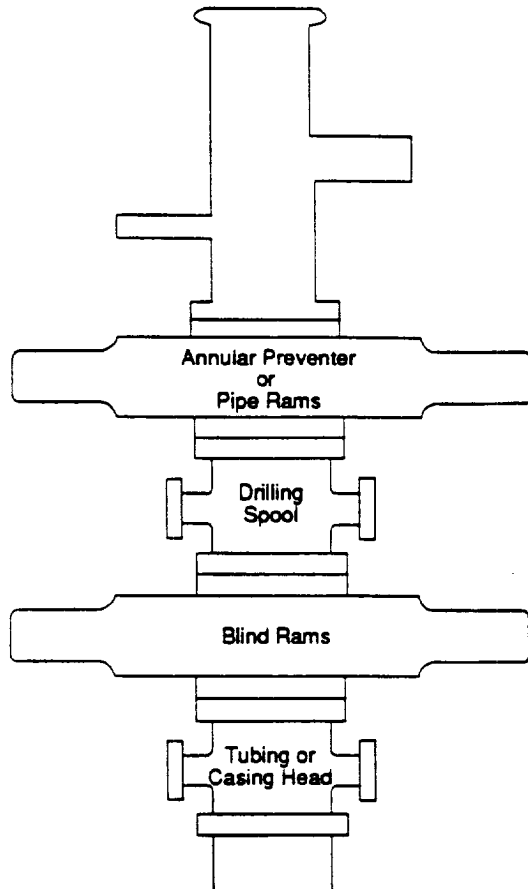


The Class II-B preventer stack is designed for drilling or workover operations. It is composed of a single hydraulically operated annular preventer on top, then a drilling spool, and a single blind ram preventer on bottom. In an alternate configuration, a single pipe ram preventer may be substituted for the annular preventer. The choke and kill lines are installed onto the drilling spool and must have a minimum internal diameter of 2". An emergency kill line may be installed on the wellhead. As the maximum anticipated surface pressure of this stack is less than 2000 psi, screwed connections may be used. All components must be of steel construction. The Class II-B blowout preventer stack is shown to the left in Figure 11J.3.

CHEVRON DRILLING REFERENCE SERIES
VOLUME ELEVEN
WELL CONTROL AND BLOWOUT PREVENTION

C. CLASS II CHOKE MANIFOLD

The Class II choke manifold is suitable for all Class II workovers and drilling operations. The Class II choke manifold is shown below in Figure 11J.7. Specific design features of the Class II choke manifold include:

1. The manifold is attached to the tubing/casing head when a Class II-A preventer stack is use. This hook-up is only recommended for Class II workover operations.
2. The manifold is attached to a drilling spool or top ram preventer side outlets when a Class II-B preventer stack is in use.
3. The minimum internal diameter is 2" (nominal) for outlets, flanges, valves and lines.
4. Includes two steel gate valves in the choke line at the wellhead/drilling spool outlet. The inside choke line valve may be remotely controlled (HCR).
5. Includes one manually adjustable choke which is installed on the side of the manifold cross. Steel isolation gate valves are installed between the choke and the cross, and downstream of the choke.
6. Includes one bleed line installed on the side of the manifold cross which is isolated by a steel gate valve.
7. Includes a pressure gauge suitable for drilling service which can display the casing pressure within view of the choke operator.
8. Screwed connections may be used in lieu of flanges or clamps.

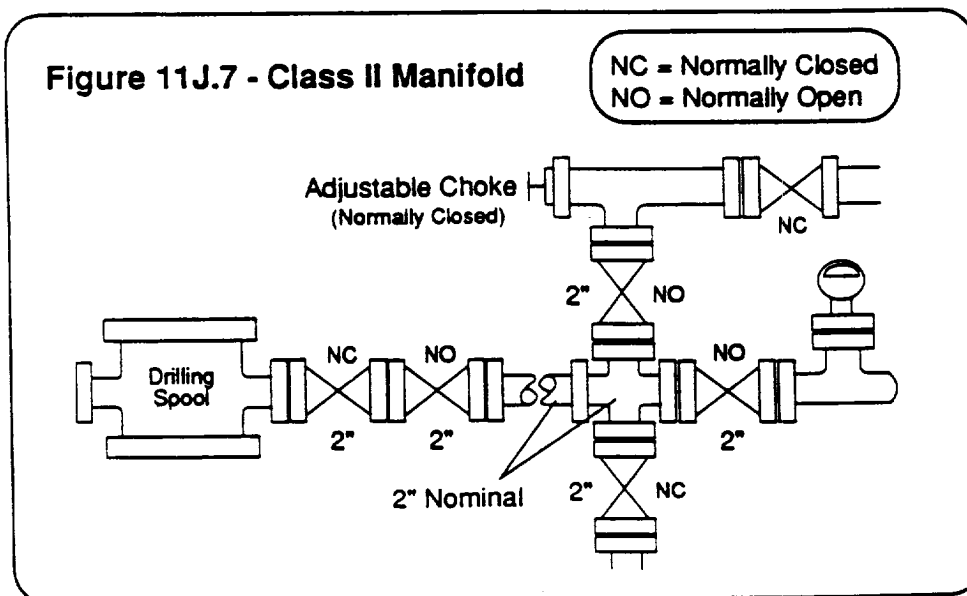

Handwritten: 6-8-92
ETP

RECEIVED
MAR 10 1992
SPE