

U.S. DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
HOBBS, NEW MEXICO 88401

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. TYPE OF WORK

DRILL ☒

DEEPEN ☐

PLUG BACK ☐

b. TYPE OF WELL

OIL
WELL ☒

GAS
WELL ☐

OTHER

SINGLE
ZONE ☒

MULTIPLE
ZONE ☐

2. NAME OF OPERATOR

WTL, Ltd

3. ADDRESS OF OPERATOR

c/o Gene Lee 1306 Meadow Lane Roswell, NM 88201

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)*

At surface

1980' FNL & 660' FWL

At proposed prod. zone

Unit E

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE*

12 Miles Southeast of Halfway, NM

15. DISTANCE FROM PROPOSED*

LOCATION TO NEAREST
PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)

16. NO. OF ACRES IN LEASE

120

17. NO. OF ACRES ASSIGNED
TO THIS WELL

40

18. DISTANCE FROM PROPOSED LOCATION*
TO NEAREST WELL, DRILLING, COMPLETED,
OR APPLIED FOR, ON THIS LEASE, FT.

19. PROPOSED DEPTH

9000'

20. ROTARY OR CABLE TOOLS

Rotary

21. ELEVATIONS (Show whether DF, RT, GR, etc.)

3796.3' GR

Controlled Water Basin

22. APPROX. DATE WORK WILL START*

ASAP

23.

PROPOSED CASING AND CEMENTING PROGRAM

R-111-P ~~Secretary's Polish~~

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
17 1/2"	13 3/8"	48#	850'	650 Sx.--Circulate
11 "	8 5/8"	24# & 32#	4500'	1650 Sx. Circulate
7 7/8"	5 1/2"	17#	9000'	1500 SX.- SEE S-115.

MUD PROGRAM:

0-----850'

Fresh Water Gel & Native Mud.

850---4500'

Brine Water

4500'-9000'

Cut Brine, Salt Gel, Starch

BOP PROGRAM:

BOP's will be installed at the onset of drilling and tested daily.
See BOP Diagram.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen or plug back, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

24.

SIGNED

Gene Lee

TITLE Agent

DATE 4-5-93

(This space for Federal or State office use)

PERMIT NO.

APPROVAL DATE

APPROVED BY

Kathy Leton

TITLE

Acty State Director

DATE

7-7-93

*See Instructions On Reverse Side

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

RECEIVED

SEP 03 1993

OOD HOBBS
OFFICE

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

DISTRICT I

P.O. Box 1980, Hobbs, NM 88240

DISTRICT II

P.O. Drawer DD, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

WELL LOCATION AND ACREAGE DEDICATION PLAT


All Distances must be from the outer boundaries of the section

Operator W.T.I. LTD.			Lease BARR NONE FEDERAL		Well No. 1
Unit Letter E	Section 10	Township 22 SOUTH	Range 32 EAST	NMPM	County LEA
Actual Footage Location of Well: 1980 feet from the NORTH line and 660 feet from the WEST line					
Ground Level Elev. 3796.3'	Producing Formation Delaware		Pool E. Livingston Ridge Wildcat Delaware	Dedicated Acreage: 40 Acres	

1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interest of all owners been consolidated by communitization, unitization, force-pooling, etc.?
☐ Yes ☐ No If answer is "yes" type of consolidation _____

If answer is "no" list of owners and tract descriptions which have actually been consolidated. (Use reverse side of this form necessary.) _____

No allowable will be assigned to the well unit all interests have been consolidated (by communitization, unitization, forced-pooling, otherwise) or until a non-standard unit, eliminating such interest, has been approved by the Division.

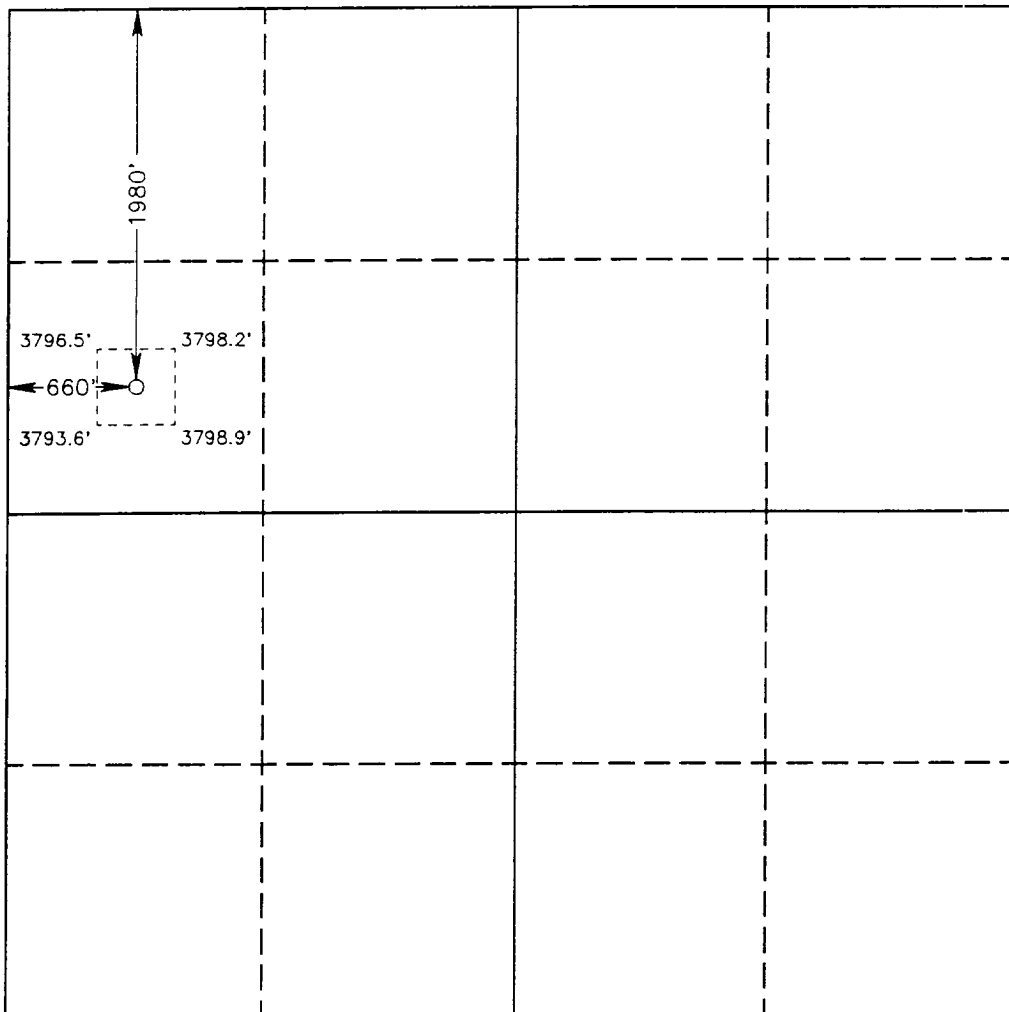

OPERATOR CERTIFICATION

I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.

Signature

Printed Name

H. E. Gene LEE

Position

Agent

Company

WTI, Ltd.

Date

4-8-93

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

APRIL 7, 1993

Signature & Seal of
Professional Surveyor

Certificate No.

JOHN W. WEST

876

RONALD J. RIDSON

3239

GARY K. JONES

7977

93-11-0557

RECEIVED

NOV 11 1993

11/11/93

APPLICATION FOR PERMIT TO DRILL

**WTI, LTD.
"Barr None" Fed. #1
1980' FNL & 660' FWL
Sec. 10-T22S-R32E
Lea County, New Mexico**

In conjunction with Form 3160-3, Application for Permit to Drill subject well, WTI, LTD. submits the following items of pertinent information in accordance with BLM requirements on Federal Lands:

1. The geologic surface formation is sandy alluvium. The ground elevation at the proposed drill site is 3796.3' at ground level.
2. The estimated tops of geologic markers are as follows:

Anhydrite	950'
Delaware Sand	4850'
Cherry Canyon	5875'
Brushy Canyon	7550'

3. Estimated depths at which water, oil, or gas formations are expected to be encountered are as follows:

Water:	550'
--------	------

Oil & Gas:	From 5000'--8800'
------------	-------------------

Fresh water zones will be protected by the 13 3/8" casing and the 8 5/8" casing strings, which will be cemented back to the surface.

4. Proposed Casing Program:
 - 13 3/8" 48# J-55 casing set at approx. 850'
 - 8 5/8" 24# & 32# J-55 casing set at approx. 4500'
 - 5 1/2" 17# J-55 casing set at approx. 9000'.
5. Proposed Pressure Control Equipment:
 - A 3000# working pressure double ram blow out preventer will be used throughout drilling operations. See BOP Diagram Exhibit "B".

RECEIVED

SEP 03 1993

U.S. DEPARTMENT OF
OFFICE

6. **Mud Program:**
A fresh water and native mud system will be used from the surface to 850'. A brine system will be used from 850' to the 8 5/8" setting depth at 4500'. Cut brine, starch, and salt gel will be used from 4500' to total depth of 9000'.
7. **Auxiliary Equipment:**
Upper and lower kelly cock vales, full opening stabbing valve with drill pipe connections, flow sensors, pvt.
8. **Testing, Logging, and Coring Program:**


Samples:	From base of surface casing to TD every 10'.
DST's:	As warranted from shows in samples.
Coring:	Side wall cores to be picked at logging.
Logging:	GR-CNL-FDC, DLL w/ RXO, EPT.
9. **No abnormal pressures or temperatures are anticipated.**
10. **Anticipated Starting Date:**
As soon as possible after approval of APD.

RECEIVED

SEP 01 1993

U.S. DEPARTMENT OF
ENERGY

EXHIBIT B

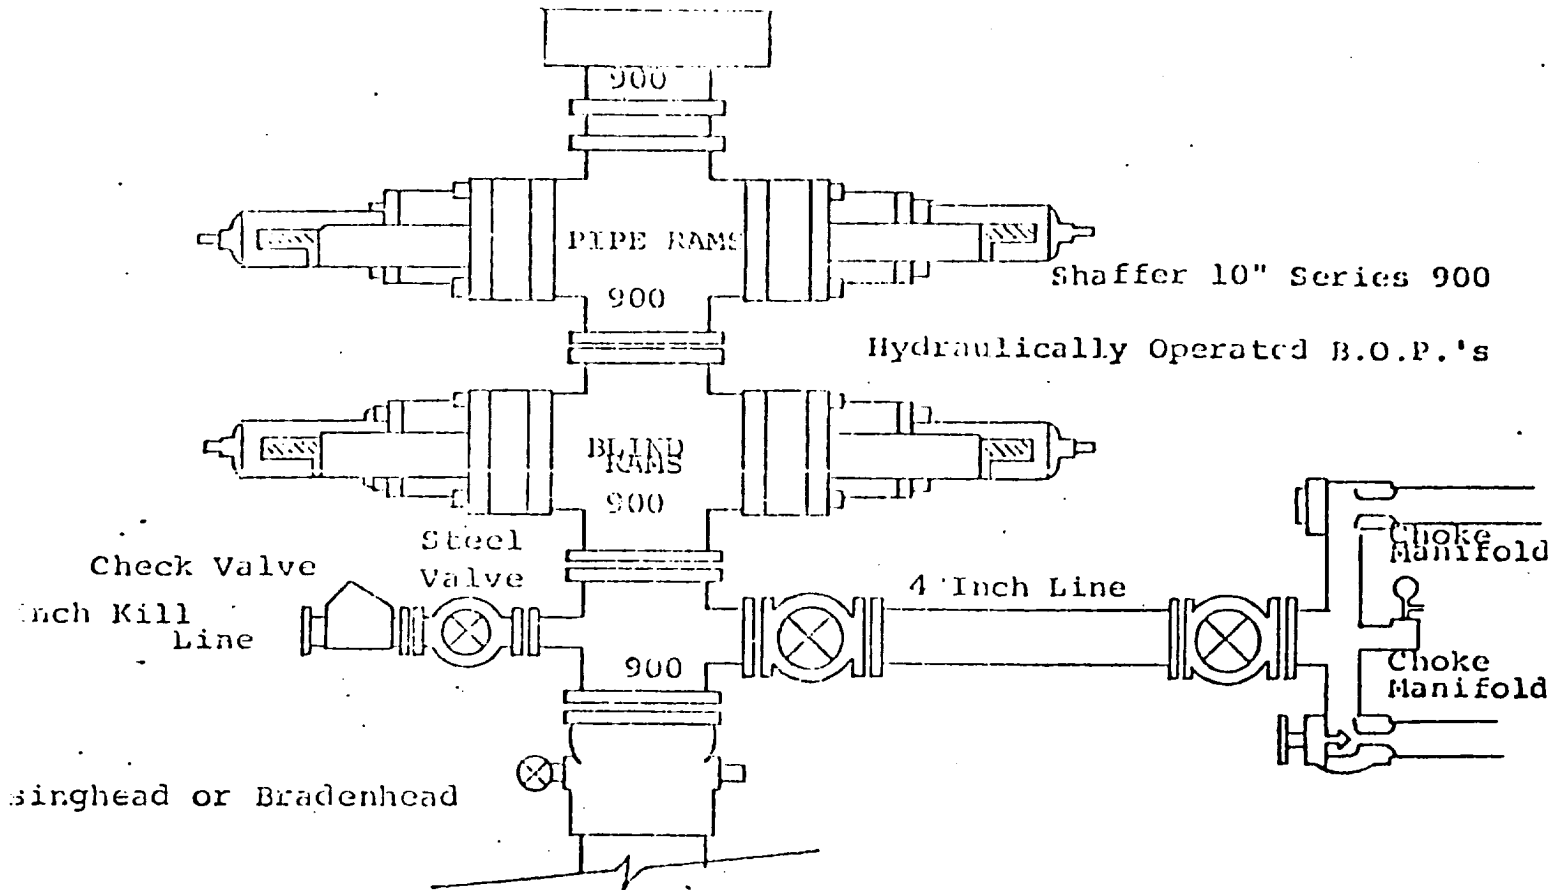

THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS

- All preventers to be hydraulically operated with secondary manual controls installed prior to drilling out from under casing.
- Choke outlet to be a minimum of 4" diameter.
- Kill line to be of all steel construction of 2" minimum diameter.
- All connections from operating manifolds to preventers to be all steel. hole or tube a minimum of one inch in diameter.
- The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate the B.O.P.'s.
- All connections to and from preventer to have a pressure rating equivalent to that of the B.O.P.'s.
- Inside blowout preventer to be available on rig floor.
- Operating controls located a safe distance from the rig floor.
- Hole must be kept filled on trips below intermediate casing. Operator not responsible for blowouts resulting from not keeping hole full.
- D. P. float must be installed and used below zone of first gas intrusion.

60-141-21

173

RECEIVED

SEP 07 1993

U.S. DEPARTMENT OF JUSTICE
OFFICE