

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

M. Oil Cons. Division
1625 N. French Dr.
Hobbs, NM 88240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

John H. Hendrix Corporation

3. Address and Telephone No.

P. O. Box 3040, Midland, TX 79702-3040 (915) 684-6631

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FSL & 1980' FWL, Sec. 11, T20S, R37E

5. Lease Designation and Serial No.

NMNM0557686

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Skaggs B Ac. 1 #7

9. API Well No.

30-025-35008

10. Field and Pool, or Exploratory Area

Skaggs Abo Gas Pool

11. County or Parish, State

Lea County, NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other Set Casing
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water


(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

4/18/00 Spud well @ 5:30 PM CST 4/18/00. Drilled 12-1/4" hole to 1415'.

4/19/00 Ran 1 - 8-5/8" Texas pattern shoe, 1 jt. 8-5/8" OD 24# J-55 ST&C, 1 - 8-5/8" float collar & 31 jts. 8-5/8" 24# J-55 ST&C csg. set at 1414'. Cemented w/ 650 sx. Class C cement w/ 4% D-20, 2% SI, tailed in w/ 195 sx. Class C w/ 2% SI. Circ. 200 sx. to pit.

4/20/00 Test csg. & pipe rams to 1200 psig. OK.

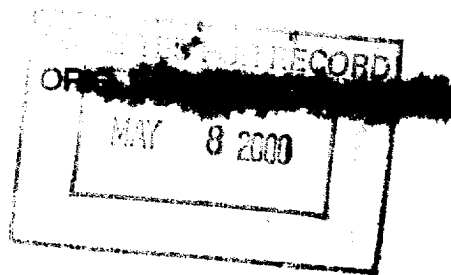

RECEIVED
2000 MAY - 31 P 2:35
BUREAU OF LAND MGMT.
LAND RESOURCE AREA

14. I hereby certify that the foregoing is true and correct

Signed

Ron H. Westlake

Title Vice President

Date 05/02/00

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date



RECEIVED
MAY 05 2000
BLM
ROSWELL, NM

4
MAY 2000
Received
Hobbs
OCD