

BOP Schematic

*Note: If BOP is equipped w/ side outlets below the rams, a spool is not required.

3000 psi WP Double Ram
Blow-out Preventor. Must be tested
to 1000 psi prior to drilling out
8-5/8" surface casing.

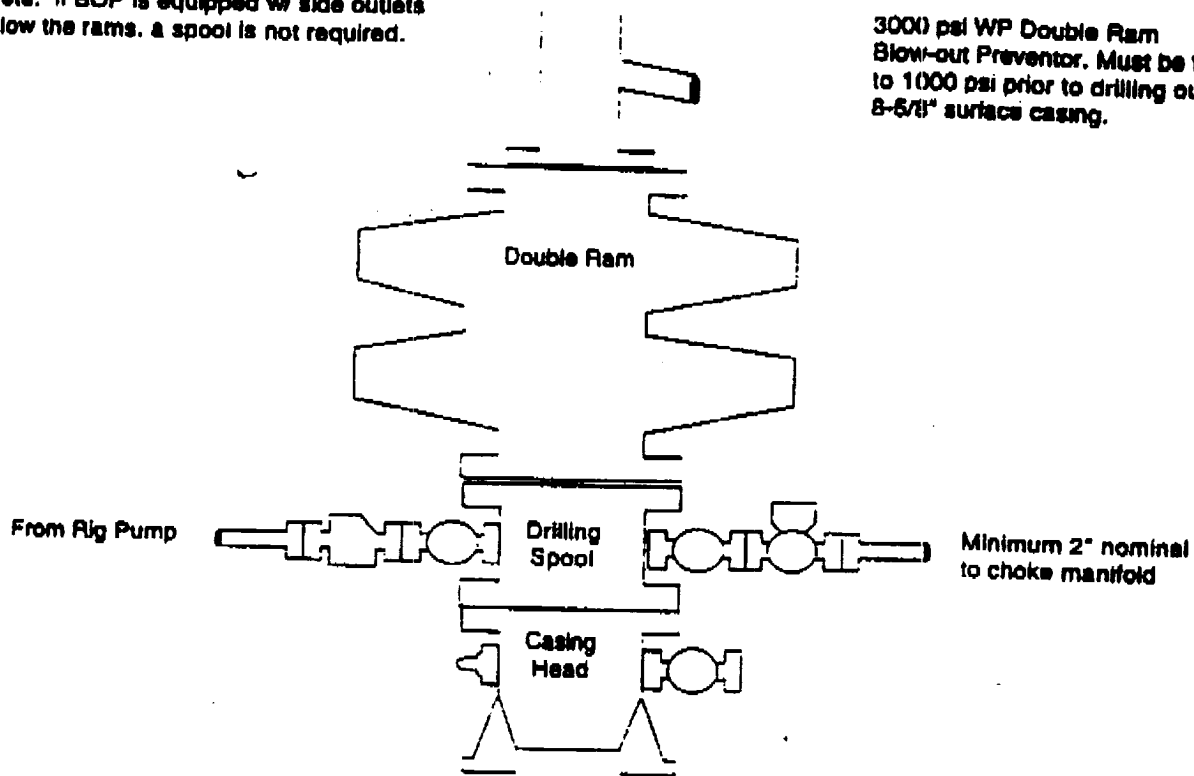
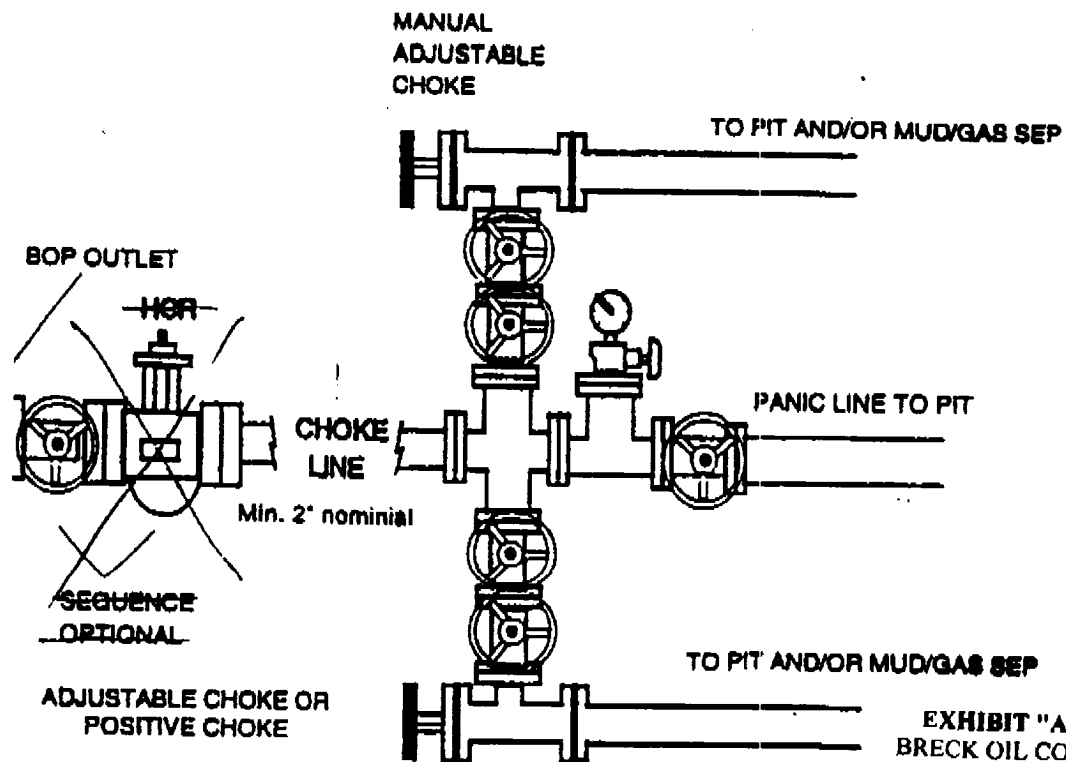
**Choke Manifold Schematic**

EXHIBIT "A"
BRECK OIL CORP.
State "H", Well No. 5
BOP Specifications

Post-It Fax Note	7671	Date	9/5/01	8 of 1 pages
To	MARIE	From	GEORGE R SMITH	
Co./Dept.	NM OCO	Co.	AGENT FOR BRECK OIL	
Phone #		Phone #	505-623-4940	
Fax #	505-393-0720	Fax #		

ELF
3/1/62
ABOVE DATE DOES NOT
INDICATE WHEN
CONFIDENTIAL LOGS
WILL BE RELEASED