

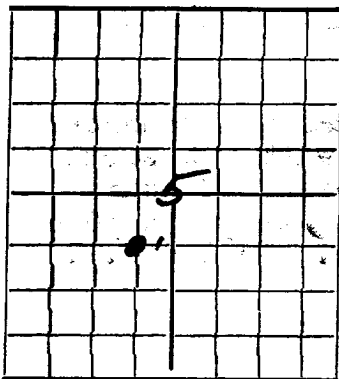
N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DEC 22 1942

OFFICE

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

FELMONT CORPORATION

Company or Operator

1213 Commerce Bldg. Houston, Texas

STATE

Well No.

1

in

1/4 Lot 11

of Sec.

5

T.

218

R. 33E

N. M. P. M.

Wildcat

Field,

Lan

County.

Well is 3300

feet south of the North line and

3300

feet west of the East line of

Section 5

If State land the oil and gas lease is No.

3-3393

Assignment No.

2

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

D E De Vito

Address

Drilling commenced

12-10-

42

Drilling was completed

Midland, Texas, 12-19-42

Name of drilling contractor

R P Coats

Address

Midland, Texas

Elevation above sea level at top of casing

3750'

feet.

The information given is to be kept confidential until

No Restrictions

19

OIL SANDS OR ZONES

No. 1, from

NONE

to

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

ROTARY DRILLING RIG USED, NO WATER SANDS LOGGED.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	45	10V	SH	315	TP			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12-3/4"	10-3/4"	315	225	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment Not treated or shot

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3717' feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing DRY HOLE, 19

The production of the first 24 hours was DRY barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

W S BOX

Driller

B R VAUGHN

Driller

J S LUSE

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 21

day of DECEMBER, 19 42

Notary Public.

Name

R P Coats

Position

Drilling Contractor

Representing

FELMONT CORPORATION

Company or Operator

My Commission expires December 17, 1944

Address 1213 Commerce Bldg, Houston, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	55	55	Caliche & redbed
55	350	295	Red beds & shells - Ran and cemented 10-3/4" casing at 315' with 225 sacks quicksset cement. Let stand 48 hours then drilled plug and tested with 1000# pressure for 30 minutes. Tested O.K.
350	590	260	Red Bed with sand breaks.
590	788	198	Shale and shells
788	1218	430	Redrock and redbeds
1218	1270	52	Hard sand
1270	1338	68	Redbed, redrock, dolomite & gyp
1338	1533	195	Redbeds and shells with sand streaks
1533	1616	83	Redbed, shells with anhydrite streaks
1616	1665	49	Shale & Gyp
1665	1690	25	Anhydrite
1690	1768	78	Anhydrite with small salt streaks
1768	1802	34	Anhydrite and redbeds.
1802	1905	103	Salt
1905	1950	45	Anhydrite
1950	2916'	966	Salt, potash with anhydrite streaks
2916	3140	24	Salt and anhydrite & gyp streaks
3140	3180	40	Salt & shells
3180	3245	65	Anhydrite with salt streaks
3245	3457	212	Potash & Gyp
3457	3716'	259	Gyp, lime & brown lime.
TOTAL DEPTH 3716' by S.I.M.			
Encountered no oil, gas or water to total depth.			
Will plug and abandon as per Form C-102 submitted herewith.			