



DUPLICATE

FORM C-105

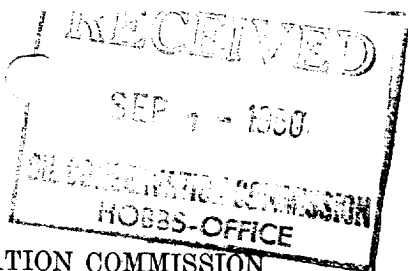

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

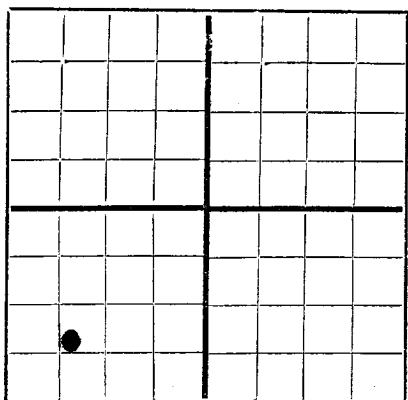

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Wilson Oil Company Box 1436 Artesia, New Mexico
Charlotte-State Company or Operator
Well No. **1** in **SW SW SW** of Sec. **5** Address **21**
34 Lease **Wildcat** Field, **Lea** County.
R. **2310**, N. M. P. M., **2310** feet south of the North line and **2310** feet west of the East line of **SW 1/4 sec 5.**
If State land the oil and gas lease is No. **B 9479** Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is **Wilson Oil Company** Address **Santa Fe, N.M.**
Drilling commenced **June 20** 19 **50** Drilling was completed **August 25** 19 **50**
Name of drilling contractor **Company Tools** Address _____
Elevation above sea level at top of casing **3725'** feet.
The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **3881** to _____ feet.
No. 2, from **3941** to _____ feet.
No. 3, from **4090-93** to _____ feet.
No. 4, from **4196'** to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
15"	70	8 rd	New	90					Surface

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
22	16	90'	100	Haliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment. _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from **0** feet to **4208'** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____, 19 _____
The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

G.C. Parish Driller **J.W. Whaley** Driller
W.R. High Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **30** ^{5th} day of **September** **August**, 19 **50**

Wanda Hunter
Notary Public

My Commission expires _____

Artesia, New Mex **8-28-50**
Place Date
Name **Raymond Lamb**
Position **Vice President**
Representing **Wilson Oil Company**
Company or Operator
Address **Box 1436**
Artesia, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	12	12	Cellar
12	25	13	Caliche
25	65	40	Sand
65	93	28	Sand and Gravel
93	295	202	Red Rock
295	305	10	Brown Shale
305	350	45	Sand
350	420	70	Red Rock
420	826	406	Red Rock and Sandy Shale
826	835	9	Sandy Shale
835	870	35	Water Sand
870	1045	175	Red Rock and Sandy Shale
1045	1185	140	Sand and Sandy Shale
1185	1730	545	Red Rock and Sandy Shale
1730	1900	170	Anhydrite
1900	1970	70	Salt, Shale and Potash
1970	2015	45	Anhydrite
2015	2055	40	Salt and Red Rock
2055	2070	15	Anhydrite
2070	2270	200	Salt and Potash
2270	2285	15	Anhydrite
2285	2390	105	Salt and Potash
2390	2405	15	Anhydrite
2405	2750	345	Salt and Potash
2750	2775	25	Anhydrite
2775	3444	669	Salt and Potash with Anhydrite stringers
3444	3477	33	Anhydrite
3477	3640	163	Gray Lime
3640	3647	7	Red Sand and Gray Lime
3647	3697	50	Gray Sandy Lime
3697	3872	175	White and Pink Lime
3872	3912	40	Sandy Lime
3912	4058	146	White Lime
4058	4062	4	Sandy Lime
4062	4113	51	Gray Lime
4113	4117	4	Brown Sandy Lime
4117	4208	91	Gray Lime
Total Depth 4208'			
Plugged and Abandon			