

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

MISCELLANEOUS NOTICES

Submit this notice in triplicate to the Oil Conservation Commission or its proper agent before the work specified is to begin. A copy will be returned to the sender on which will be given the approval, with any modifications considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of notice by checking below:

NOTICE OF INTENTION TO TEST CASING SHUT-OFF		NOTICE OF INTENTION TO SHOOT OR CHEMICALLY TREAT WELL	
NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO PLUG OR OTHERWISE ALTER CASING	
NOTICE OF INTENTION TO REPAIR WELL		NOTICE OF INTENTION TO PLUG WELL	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO DEEPEN WELL			

Santa Fe, New Mexico

7-9-51

Place

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico.

Gentlemen:


Following is a notice of intention to do certain work as described below at the Wilson Oil Company
Sunray-State Well No. 1 in Str. Lot 1
of Sec. 5, T. 21, R. 34, N. M. P. M., Wildcat Field,
County.

FULL DETAILS OF PROPOSED PLAN OF WORK
FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS OF THE COMMISSION

Well was drilled to 3850'. Encountered salt water at 3672' and sulfur water at 3845'.

Permission is requested to plug well as follows:

- 10 sac cement plug at T.D.
- 15 sac cement plug at 3422'
- 10 sac cement plug at 1915'
- 5 sac cement plug at surface with regulation marker

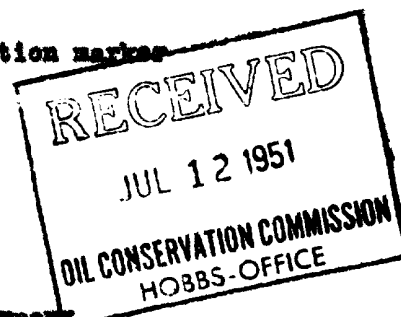

JUL 13 1951

Approved _____, 19_____
except as follows:

Wilson Oil Company

Company or Operator

By

Raymond Lamb

Position

Vice President

Send communications regarding well to

Name

Wilson Oil Company

Address

P.O. Box 627


Santa Fe, New Mexico

OIL CONSERVATION COMMISSION

Title

Oil & Gas Inspector

By



NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELL

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut-offs, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below:

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL	X		

Santa Fe, New Mexico

Place

7-10-51

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Wilson Oil Company

Sunray-State

Well No. 1 in the

COMPANY OR OPERATOR

LEASE

Ctr. Lot 11

of Sec. 5, T. 21

R. 34, N. M. P. M.,

Wildcat

Field, Lea

County


The dates of this work were as follows: 7-8-51

Notice of intention to do the work was (~~was not~~) submitted on Form C-102 on 7-9- 1951
and approval of the proposed plan was (~~was not~~) obtained. (Cross out incorrect words)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

The Wilson Oil Company Sunray-State #1 was plugged as set out on State

Form C102, Filed on 7-9-51

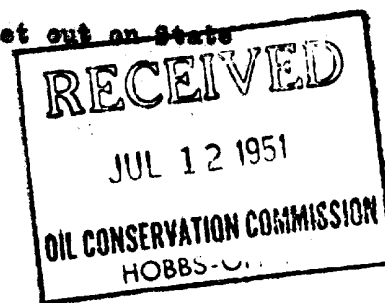

Witnessed by Mr. Joe B. Allen
Name

Wilson Oil Company
Company

Vice-President
Title

Subscribed and sworn to before me this

10 day of July, 1951

Ere W. [Signature]
Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name Raymond Law

Position Vice President

Representing Wilson Oil Company
Company or Operator

My Commission expires July 12, 1953

Address Box 627, Santa Fe, New Mexico

Remarks:

APPROVED


Date JUL 13 1951

Ray [Signature]
Name
Oil & Gas Inspector
Title

DUPLICATE

FORM C-105


N

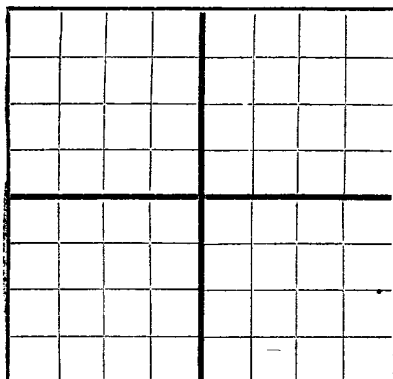

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

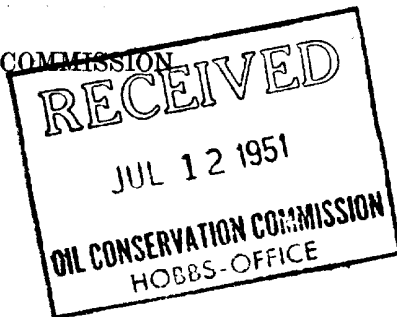

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Wilson Oil Company P.O. Box 627, Santa Fe, New Mexico
Company or Operator Address
Sunray State Well No. 1 in Ctr. Lot 11 of Sec. 5, T. 21
Lease
R. 34, N. M. P. M., Wildcat Field, Lea County.
Well is feet south of the North line and feet west of the East line of
If State land the oil and gas lease is No. 12022 Assignment No. 1
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is Sunray Oil Corp Address Midland, Texas
Drilling commenced 5-11 1951 Drilling was completed 7-7 1951
Name of drilling contractor Company Tools Address
Elevation above sea level at top of casing 3717 feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 3672 to 3692 feet Salt Water
No. 2, from 3845 to 3850 feet Sulfur Water
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
22	16	110	100	Halfburton		
15	13	688	Mudded	"		
12"	10-3/4	909	"	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing, 19.
The production of the first 24 hours was barrels of fluid of which % was oil; %
emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

W.R. High, Driller R.L. Reed, Driller
J.W. Whaley, Driller G.K. Parish, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 10th
day of July, 1951

Eve Wientge
Notary Public

My Commission expires July 12, 1953

Santa Fe, N.Mex. 7-9-51
Place Date
Name Raymond Lamb
Position Vice-President
Representing Wilson Oil Company
Company or Operator
Address Box 627, Santa Fe, N.Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Caliche
20	75	55	Sand
75	110	35	Red beds
110	295	185	Red rock
295	460	165	Red rock, Sandy shale, Water at 405'
460	705	245	Red rock
705	875	170	Sandy shale
875	910	35	Red rock
910	1030	120	Sandy shale
1030	1388	358	Red rock, sand, water sand 1100-25
1388	1735	347	Sandy shale
1735	1771	36	Red rock
1771	1915	144	Anhydrite
1915	1965	50	Salt
1965	2135	170	Anhydrite, salt
2135	2450	315	Salted potash
2450	2470	20	Anhydrite
2470	3253	783	Salted Potash
3253	3270	17	Anhydrite
3270	3422	152	Salt
3422	3460	38	Anhydrite
3460	3602	142	Gray lime
3602	3701	99	Gray sand, water @ 3672, 3792
3701	3758	57	White Lime
3758	3766	8	Sandy Lime
3766	3818	52	Gray Lime
3818	3842	24	Sandy lime
3842	3850	8	Lime, sulfur water 3845'
Total Depth 3850			
Plugged - abandon			