


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

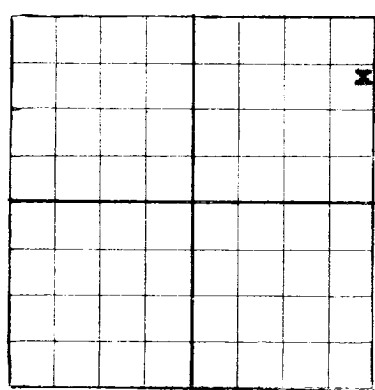

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Fidel & Thomas Artesia, New Mexico
Company or Operator Address

Well No. 1 in NE-NE of Sec. 12 T. 21
Lease

R. 34 N. M. P. M. West Eunice Field, Lee County.

Well is 2210 feet north of the 330 line and 330 feet west of the East line of S 12- R 34

If State land the oil and gas lease is No. E746 Assignment No. 1

If patented land the owner is State Address _____

If Government land the permittee is _____ Address _____

The Lessee is Dale Restler Address Artesia, N. M.

Drilling commenced October 1946 Drilling was completed Feb., 13 1947

Name of drilling contractor Thomas & Sons Address Artesia, N. M.

Elevation above sea level at top of casing 3702 feet.

The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 285 to 310 No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 285 to 310 feet. 25

No. 2, from 885 to 940 feet. 55

No. 3, from _____ to _____ feet. _____

No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>8 1/2</u>	<u>32</u>	<u>8</u>		<u>1272</u>	<u>Texas</u>				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>10 1/2</u>	<u>8 1/2</u>	<u>1272</u>	<u>25</u>	<u>circulated</u>		<u>100 sacks</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 1272 feet, and from _____ feet to _____ feet

Cable tools were used from 1272 feet to 3905 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____ 19____

The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Bill Martin Driller _____ Driller

Jim Byler Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 14 day of February 1947

J. W. Williams Notary Public

My Commission expires _____

Artesia N. M. Place Date 2-14-47

Name D. J. Thomas

Position Partner

Representing Fidel & Thomas Company or Operator

Address Artesia N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20		Lime
20	175		Red Rock & Sand
175	185		Lime
185	200		Blue Shale
200	385		Red Rock
385	460		Sand & Gravel
460	900		Red Rock
900	940		Sand
940	960		Andy.
960	1260		Red Rock
1260	1410		Andy.
1410	1715		Red Rock
1715	1755		Andy.
1755	1765		Salt
1765	1810		Andy.
1810	2240		Salt
2240	2245		Andy.
2245	2305		Salt
2305	2345		Salt & Potash
2345	2350		Andy.
2350	2360		Red Rock
2360	2450		Salt
2450	2485		Andy.
2485	2530		Shale
2530	2900		Salt & Potash
2900	2915		Blue Mud
2915	2945		Andy.
2945	2980		Salt
2980	3015		Andy.
3015	3200		Salt
3200	3230		Andy.
3230	3325		Salt
3325	3385		Lime
3385	3510		Andy.
3510	3600		Red Sand
3600	3680		Red Sand
3680	3700		Andy.
3700	3715		Blue Shale
3715	3770		Lime & Red Rock
3770	3800		Sand
3800	3830		Lime & Sand
3830	3872		Lime
3872	3895		Sandy Lime
3895	3905		Sandy Lime