FORM C-105

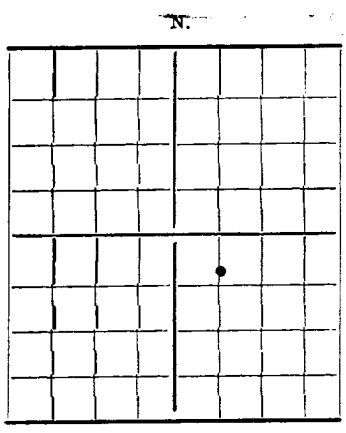

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE

J.C. Clower — Eunice, N.M.
Company or Operator — Address

State — Well No. 1 in NW¼ SE¼ of Sec. 16, T. 21
Lease

R. 34, N. M. P. M., Field, Lea County.

Well is 3300 feet south of the North line and 1980 feet west of the East line of Sec. 16.

If State land the oil and gas lease is No. B-7849 Assignment No.

If patented land the owner is , Address

If Government land the permittee is , Address

The Lessee is J.C. Clower, Address Eunice, N.M.

Drilling commenced Sept. 2, 1948 19. Drilling was completed Oct. 15, 19 48.

Name of drilling contractor J.C. Clower, Address Eunice, N.M.

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 3936 to 3988 — No. 4, from to

No. 2, from 3944 to 3948 — No. 5, from to

No. 3, from to — No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 165 to 170 feet. 2 bbls. per hr.

No. 2, from 325 to 335 feet. 8 bbls. per hr.

No. 3, from 690 to 695 feet. 10 bbls. per hr.

No. 4, from 670 to 690 feet. Hole full

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	PERFORATED TO	PURPOSE
13	54	8	S H	210	Guide				Surface
10	40	8	"	847	"				Shutoff
8	32	8	"	1811	"				Shutoff
7	20	10	"	3850	Float				Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15	13	210	74	HOWCO	10 lb.	hole full
8	7	3850	220	HOWCO		20 sax

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 3948 feet, and from feet to feet

PRODUCTION

Put to producing 11/1, 19 48.

The production of the first 24 hours was 218 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

T.H. Bennett, Driller — O.B. Bryan, Driller

B.D. Dozier, Driller — , Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Eunice, N.M. 11/3/48
Place — Date

Subscribed and sworn to before me this 3 day of November, 19 48

Kay Ernest a
Notary Public.

My Commission expires May 22, 1951.

Name J.P. Watkins

Position Drilling Supt.

Representing J.C. Clower
Company or Operator

Address Eunice, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	9	9	Caliche
9	165	156	Sand
165	170	5	Water sand
170	325	155	Red shale
325	335	10	Water sand
335	690	365	Red shale
690	695	5	Water sand
695	870	175	Red shale
870	890	20	Water sand
890	1095	205	Shale
1095	1345	250	Sandy shale
1345	1874	529	Red shale
1874	1990	116	Anhydrite
1990	3500	1510	Salt section
3500	3675	175	Lime
3675	3715	40	Sandy lime
3715	3725	10	Sand
3725	3743	18	Yates sand gas
3743	3758	15	Lime
3758	3795	7	Gray lime
3795	3817	22	Sandy lime
3817	3886	69	Lime
3886	3936	50	Lime
3936	3938	2	Broken lime oil
3938	3944	6	Lime
3944	3948	4	lime oil