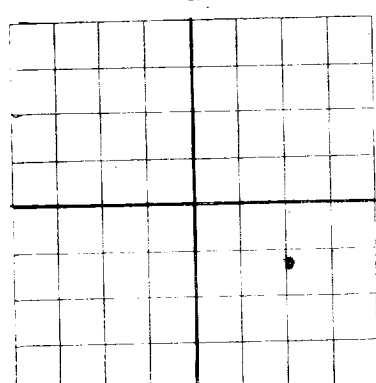


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

J.C. Clower
Company or Operator

Eunice, N.M.

Address

State

Well No. 2

in NE SE

of Sec. 16

T. 21

R. 34

N. M. P. West Wilson

Field, Lea

County.

Well is 3300 feet south of the North line and 990 feet west of the East line of S 16

If State land the oil and gas lease is NB 7849

Assignment No. 4

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is J.C. Clower

Address Eunice, N.M.

Drilling commenced Nov. 16, 1948

Drilling was completed Jan. 7, 1949

Name of drilling contractor J.C. Clower

Address Eunice, N.M.

Elevation above sea level at top of casing 3723 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3931

to 3944

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 165

to 170

feet. 2 bbls. per hr.

No. 2, from 315

to 340

feet. 3 bbls. per hr.

No. 3, from 1125

to 1195

feet. Hole full

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
12 1/2	40	8	S H	195	Guide				Surface
10	40	8	S H	846	"				Shutoff
8	32	8	S H	1385	"				Shutoff
7	20	8	New	3850	Float				Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15	12 1/2	195	75	P & P	10 lb.	hole full
8	7	3850	175	P & P	10 lb.	30 sax

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
 Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
 Cable tools were used from 0 feet to 3944 feet, and from feet to feet

PRODUCTION

Put to producing Jan. 20, 1949
 The production of the first 24 hours was 74 barrels of fluid of which 100 % was oil;
 emulsion; % water; and % sediment. Gravity, Be.
 If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
 Rock pressure, lbs. per sq. in.

EMPLOYEES

T.R. Bennett

Driller

O.B. Bryan

Driller

B.D. Dozier

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 25

Eunice, N.M.

Jan. 25, 1949

day of January 1949

Name J.R. Whiteaker

Position Drilling Supt.

Representing J.C. Clower

My Commission expires May 22, 1951.

Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Caliche
40	120	80	Sand
120	315	195	Shale
325	345	20	Water sand
340	855	415	Shale
855	885	30	Sandy shale
885	1125	240	Shale
1125	1195	70	Water Sand
1195	1325	130	Sandy shale
1325	1805	480	Shale
1805	1825	20	Anhydrite
1825	3470	1645	Salt section
3470	3490	20	Anhydrite
3490	3635	145	Sandy lime
3635	3660	25	Sandy lime
3660	3675	15	Lime
3675	3685	10	Brown Sand & lime
3685	3710	25	Broken lime
3710	3720	10	Red shale
3720	3725	5	Sandy shale
3725	3745	20	Sandy lime
3745	3800	55	Lime
3800	3820	20	Sandy lime
3820	3870	50	Lime & bentonite
3870	3880	10	Soft lime
3880	3890	10	Broken lime
3890	3895	5	Sandy lime
3895	3905	10	White lime
3905	3920	15	Sandy lime
3920	3931	11	Lime
3931	3944	13	Lime (Oil)