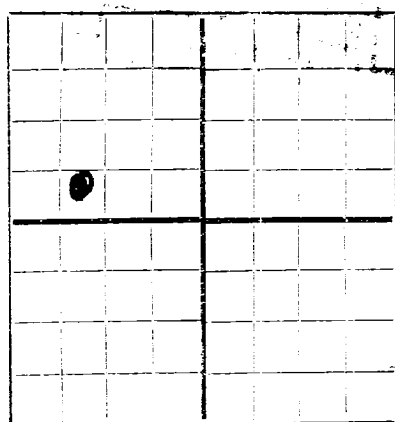


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Wilson Oil Company P.O. Box 627 Santa Fe, N.M.
Company or Operator Address
State **E 229** Well No. **38** in **SE SW NW** of Sec. **23**, T. **21**
Lease
R. **34**, N. M. P. M. **Wilson** Field, **Lea** County.
Well is **2310** feet south of the North line and **4290** feet west of the East line of **see 23**
If State land the oil and gas lease is No. **E 229** Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is **Wilson Oil Company** Address **Santa Fe, N.M.**
Drilling commenced **12-21** 19 **49** Drilling was completed **2-8** 19 **50**
Name of drilling contractor **Company Tools** Address _____
Elevation above sea level at top of casing **3684** feet.
The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **915** to **925** feet.
No. 2, from **3905** to **3910** feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
16	70	8 rd	new	190					Surface
13'	48	"	S.H.	pulled					Water shut-off
10	38	"	S.H.	pulled					"

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
22	16	201	125	Halibuton	Circulated	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from **0** feet to **3943'** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____, 19 _____
The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

W. R. High Driller **John Whaley** Driller
G. C. Parish Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **10** day of **Feb**, 19 **50** **Artesia, N.M.** **2-10-50** Date
Name **Kayward Lamb**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Caliche
20	120	100	Sand
120	130	10	Gravel
130	135	5	Yellow Mud
135	705	570	Red Beds
705	840	135	Sandy Shale
840	875	35	Red Rock
875	900	25	Brown Shale
900	915	15	Sandy Shale
915	1000	85	Sand Water @ 915-25
1000	1648	648	Sandy shale and Red Rock
1648	1685	37	Anhydrite
1685	1690	5	Red Rock
1690	1700	10	Anhydrite
1700	1710	10	Salt and red rock
1710	1790	80	Anhydrite
1790	1935	145	Salt
1935	1945	10	Anhydrite
1945	1985	40	Red Rock and Shale
1985	2340	355	Salt and Red rock
2340	2360	20	Anhydrite
2360	2435	75	Salt and Potash
2435	2447	12	Anhydrite
2447	2957	510	Salt and Potash
2957	2982	25	Anhydrite
2982	3190	208	Salt and Potash
3190	3214	24	Anhydrite and salt
3214	3348	134	Salt
3348	3354	6	Anhydrite
3354	3380	26	Salt and Potash
3380	3422	42	Anhydrite
3422	3580	158	Gry and Brown Lime
3580	3608	28	Red & Gry Sand Sho gas @ 3580-87
3608	3621	13	Gry Lime
3621	3628	7	Red Sand
3628	3636	8	Pink Lime
3636	3676	40	Red Gry Sand Sho. gas @ 3656'
3676	3701	25	Gry Lime
3701	3709	8	White Lime
3709	3728	19	Red Sand & Shale
3728	3807	79	Gry Sandy Lime
3807	3822	15	White Lime
3822	3868	46	Gry Sandy Lime
3868	3887	19	White Lime
3887	3915	28	Gry Lime
3915	3943	28	Gry Lime Water @ 3905-10
3943 Total Depth			
Plugged and Abandoned.			