


N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

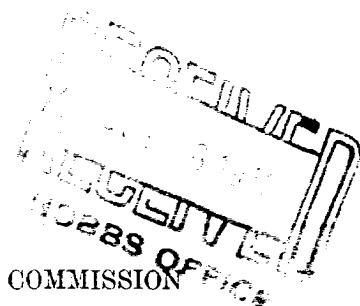

A 10x10 grid with a thick cross dividing it into four 5x5 quadrants. The letter 'I' is in the bottom-left quadrant.

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). **SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.**

WILSON OIL COMPANY **Box 627** **Santa Fe, New Mexico**
 Company or Operator Address
State B-10792 Well No. **29** in **NW SW SW** of Sec. **24**, T. **21 S**
 Lease
 R. **34 E**, N. M. P. M., **Wilson** Field, **Los** County.
 Well is **330** feet south of the North line and **990** feet west of the East line of **SW 1 SW 1**
 If State land the oil and gas lease is No. **B-10792** Assignment No. _____
 If patented land the owner is _____, Address _____
 If Government land the permittee is _____, Address _____
 The Lessee is _____, Address _____
 Drilling commenced **8-6** 19 **48** Drilling was completed **9-25** 19 **48**
 Name of drilling contractor **Wilson Oil Company**, Address **Santa Fe, New Mexico**
 Elevation above sea level at top of casing **3644** feet.
 The information given is to be kept confidential until _____ 19 _____.

OIL SANDS OR ZONES

No. 1, from 3725 to 3753 No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from	735	to	760	feet.	2	bailer/	hr
No. 2, from	855	to	885	feet.	4	"	"
No. 3, from	910	to	920	feet.			
No. 4, from		to		feet.			

CASING RECORD

[illegible]

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
22	16"	153	150	Halliburton		
10	7"	3656	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material..... Length..... Depth Set.....
Adapters — Material..... Size.....

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment.....

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from.....feet to.....feet, and from.....feet to.....feet

Cable tools were used from.....0.....feet to.....3756.....feet, and from.....feet to.....feet.

PRODUCTION

Put to producing.....Sept. 25....., 19 48.

The production of the first 24 hours was.....360.....barrels of fluid of which.....100.....% was oil;% emulsion;% water; and.....% sediment. Gravity, Be.....

If gas well, cu. ft. per 24 hours.....Gallons gasoline per 1,000 cu. ft. of gas.....

Rock pressure, lbs. per sq. in.....

EMPLOYEES

W. R. High	Driller	E. T. Reynolds	Driller
J. W. Whaley	Driller		Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4th Santa Fe, New Mexico October 4, 1948
day of October, 19 48
Gre Wentz
Notary Public
My Commission expires July 12, 1949

Name Raymond Kent
Position Asst. to President
Representing WILSON OIL COMPANY
Company or Operator
Address P.O. Box 627, Santa Fe, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Caliche
20	95	75	Sand
95	112	17	Water Sand
112	205	93	Sand, Red Rock
205	690	485	Red Beds
690	735	45	Sand and Red Shale
735	760	25	Water Sand 2 Bailers /hour
760	855	95	Sand & Shale
855	885	30	Water Sd. 4 bailers /hr.
885	910	25	Red beds
910	930	20	Water Sand
930	1612	692	Red beds
1216	1755	539	Anhydrite
1755	1950	195	Salt
1950	1970	20	Anhydrite
1970	3225	1255	Salt
3225	3242	17	Anhydrite
3242	3260	18	Salt
3260	3350	90	Anhydrite
3350	3453	103	Gray Lime
3453	3474	21	Red Sand Show Gas
3474	3500	26	Gray Lime
3500	3516	16	Red Sand Inc. Gas
3516	3533	17	Lime & Sand
3533	3563	30	Red Sand Inc. Gas
3563	3582	19	Gray Lime
3582	3656	74	Gray Lime (Oder Oil 3626 (Show Oil 3634
3656	3719	74	Gray Lime Show Oil 3663-78
3719	3730	11	Gray Lime Top Oil Zone 3725
3730	3743	13	Brown & Gray Lime Inc. in Oil
3743	3756	13	Gray Lime Inc. Oil 3746-50