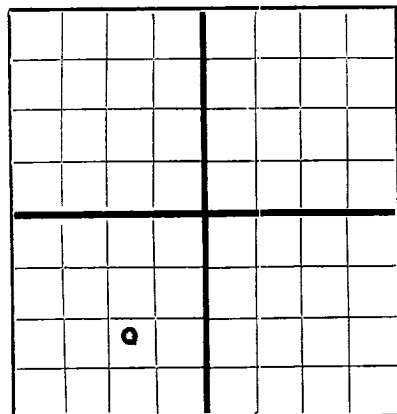



N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Wilson Oil Company **P.O. Box 627 Santa Fe, New Mexico**
Company or Operator Address
State E-10792 Well No. **32** in **SE 1/4 SW 1/4** of Sec. **24**, T. **21**
Lease
R. **34**, N. M. P. M., **Wilson** Field, **Los** County.
Well is **4290'** feet south of the North line and **3630** feet west of the East line of **Section 24**
If State land the oil and gas lease is No. **E-10792** Assignment No. _____
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is **Wilson Oil Company**, Address **Santa Fe, N.M.**
Drilling commenced **2-25-49** 19____ Drilling was completed **4-15-49** 19____
Name of drilling contractor **Company Tools**, Address _____
Elevation above sea level at top of casing **3638'** feet.
The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from **3744'** to **3752'** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **100** to **125** feet.
No. 2, from **900** to **930** feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
16	70	8 rd	new	177	Larkin				Surface Water ShutOff
13	48	"	S.H.	691	"				
10 3/4	38	"	S.H.	1215	"				
7	20	"	new	3648	Haliburton				Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
22	16	177	150	Haliburton		
8 1/2	7	3648	400	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from **0** feet to **3652'** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **4-15-49** 19____
The production of the first 24 hours was **900** barrels of fluid of which **100** % was oil; _____ % emulsion; **none** % water; and **none** % sediment. Gravity, Be. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

V. R. High Driller **A. L. Fohn** Driller
G. C. Parrish Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **20**day of **April** 19**49**

Thomas L. Fohn
Notary Public

My Commission expires **12-13-50****Artesia, New Mexico** **April 20, 1949**Name **Raymond Lawl**Position **Engineer**Representing **Wilson Oil Company**Address **P.O. Box 627 Santa Fe, N.M.**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	25	25	Caliche
25	100	75	Sand
100	125	25	Water Sand
125	177	52	Red Rock
177	595	418	Red Rock
595	699	104	Red Rock
699	780	81	Red Rock
780	800	20	Sand
800	840	40	Red Rock
840	900	60	Sand & Red Rock
900	930	30	Water Sand
930	970	40	Sand
970	1215	245	Red Rock and Shale
1215	1613	398	Red Rock and Shale
1613	1650	37	Anhydrite
1650	1660	10	Salt
1660	1750	90	Anhydrite
1750	1830	80	Salt
1830	1865	35	Anhydrite
1865	2130	265	Salt & Red Rock
2130	2165	35	Anhydrite
2165	2850	685	Salt
2850	2915	65	Anhydrite
2915	3276	361	Salt
3276	3316	40	Anhydrite
3316	3385	69	Anhydrite and Lime
3385	3450	65	Gray Lime
3450	3472	22	Sandy Lime
3472	3517	45	Sand Show Gas
3517	3567	50	Sandy Lime
3567	3586	19	Red Sand Show Gas
3586	3648	62	Lime
3648	3703	55	Lime (Show Gas 3650-60: Show Oil 3660-75
3703	3742	39	Lime and Sand
3742	3752	10	Brown Lime
			Total Depth 3752'
			Top Pay 3744'