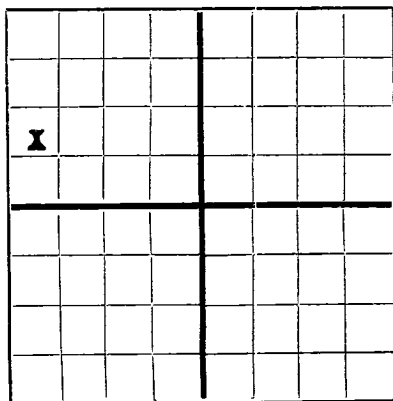


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Barney Cockburn Box 115, Artesia, New Mexico
Company or Operator Address
Ohio State Well No. 1 in ~~NE 1/4~~ of Sec. 25, T. 21S
Lease
R. 34E, N. M. P. M., Wilson Field, Lea County.
Well is 1550 feet south of the North line and 330 feet East of the East line of Sec. 25-21S-34E
If State land the oil and gas lease is No. B-7905 Assignment No.
If patented land the owner is, Address.
If Government land the permittee is, Address.
The Lessee is Ohio Oil Co., Address.
Drilling commenced 1-13-48 19 Drilling was completed 4-23-48 19
Name of drilling contractor Marshall, Smith & Rupe, Address Artesia, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 3/4"	42#	10	SE	204'					
7"	20#	8	NEW	3805'	Larkin				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
8 5/8"	7" OD	3805	30	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3715 feet, and from feet to feet
Cable tools were used from 3715 feet to 3916 feet, and from feet to feet

PRODUCTION

Put to producing Dry Hole, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Harry Rupe, Driller A. D. Rupe, Driller
L. G. Hoover, Driller B. N. Jackson, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 26th day of January, 1949.
Notary Public
My Commission expires 1-26-1952
Artesia, New Mexico 1-26-49
Name J. Wright
Position Agent
Representing Barney Cockburn
Company or Operator
Address Box 115, Artesia, N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1161	1161	Red Bed
1161	1222	61	Shale
1222	1282	60	Shale & Shells
1282	1648	366	Shale
1648	1695	47	Sandy Shell - Shale
1695	1750	55	Shale
1750	1797	47	Shale & Anhydrite
1797	2804	1007	Shale & Salt
2804	3154	350	Shale & Anhydrite
3154	3445	291	Shale, Anhydrite & Salt
3445	3475	30	Anhydrite & Shale
3475	3509	34	Anhydrite, Shale & Lime
3509	3578	69	Anhydrite & Lime
3578	3613	35	Shale & Lime
3613	3623	10	Lime
3623	3627	4	Shale & Lime
3627	3690	63	Lime
3690	3712	22	Lime & Sand
3712	3715	3	Lime
3715	3737	22	Gray Sand
3737	3743	6	Anhydrite, Gray Sand & Red Sand
3743	3748	5	Dolomite, Shale
3748	3757	9	Dolomite, Shale
3757	3762	5	Dolomite, Shale & Gray Sand
3762	3777	15	Dolomite, Gray Sand
3777	3783	6	Dolomite, Gray Sand
3783	3788	5	Dolomite, Shale
3788	3794	6	Dolomite, Gray Sand
3794	3797	3	Dolomite, Shale
3797	3804	7	Dolomite, Gray Sand
3804	3809	5	Dolomite, Gray Sand & Shale
3809	3811	2	Dolomite, & Shale
3811	3835	24	Dolomite & Gray Sand
3835	3844	9	Dolomite, Shale & Gray Sand
3844	3855	11	Dolomite, Gray Sand
3855	3858	3	Dolomite, Shale & Gray Sand
3858	3860	2	Dolomite
3860	3866	6	Dolomite & Gray Sand
3866	3879	13	Dolomite, Shale & Gray Sand
3879	3881	2	Dolomite, Gray Sand
3881	3889	8	Dolomite, Shale & Gray Sand
3889	3892	3	Dolomite & Gray Sand (a little sulphur water)
3892	3899	7	Dolomite, Shale & Gray Sand
3899	3916	17	Dolomite & Gray Sand

TD