


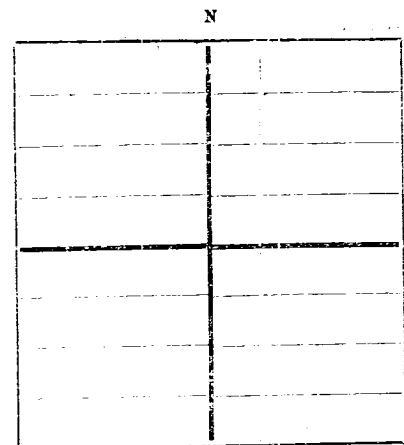

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Wilson Oil Company P.O. Box 627 Santa Fe, N.M.
Company or Operator Address
State B-9611 # 36 Well No. **36** in **NW 1/4 SE 1/4** of Sec. **27** T. **21**
Lease
R. **34**, N. M. P. M., **Wilson** Field. **Los** County.
Well is **3300** feet south of the North line and **1980** feet west of the East line of **Sec 27**
If State land the oil and gas lease is No. **B-9611** Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is _____ Address _____
Drilling commenced **11-11-49** 19____ Drilling was completed **12-14-49** 19____
Name of drilling contractor **Company Tools** Address _____
Elevation above sea level at top of casing **3682'** feet.
The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from **125** to **135** feet.
No. 2, from **765** to **795** feet.
No. 3, from **935** to **1015** feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SLEEVE	IF FILLED FROM	PERFORATED FROM TO	PURPOSE
16	70	3 rd	new	195	larkin			Surface water shut-off
13	48	3 rd	S.H.	720				
10	38	3 rd	S.H.	1250				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	API GRAVITY	AMOUNT OF MUD USED
22	18	205	150	Haliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet and from _____ feet to _____ feet
Cable tools were used from **0** feet to **3676** feet and from _____ feet to _____ feet

PRODUCTION

Put to producing _____ 19____
The production of the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity. Be. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

W.A. High _____, Driller **John Whaley** _____, Driller
G.C. Parish _____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **17** day of **December**, 19**49**

Notary Public
My Commission expires **August 28, 1953**
Artesia, N.M. **12-17-49**
Place Date
Name **Raymond Hunt**
Position **Petroleum Engineer**
Representing **Wilson Oil Company**
Company or Operator
Address **P.O. Box 627 Santa Fe, New Mexico**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	110	110	Sand - Gravel
110	125	15	Blue shale
125	145	20	Sand - Gravel
145	165	20	Red rock
165	195	25	Sand and shale
195	570	380	Red rock
570	580	10	Sandy shale
580	725	145	Sandy red rock
725	795	70	Sandy shale
795	895	100	Red rock
895	1015	120	Water sand
1015	1150	135	Sandy shale
1150	1250	100	Sandy red rock
1250	1585	335	Sandy shale
1585	1705	120	Red rock
1705	1740	35	Anhydrite
1740	1775	35	Salt and anhydrite
1775	1860	85	Anhydrite
1860	2005	145	Salt
2005	2040	35	Anhydrite
2040	2315	275	Salt
2315	2340	25	Anhydrite
2340	2780	440	Salt & Potash
2780	2800	20	Anhydrite
2800	3085	285	Salt
3085	3120	35	Anhydrite
3120	3405	285	Salt
3405	3602	197	Salt and anhydrite (anhydrite 3405-3602)
3602	3615	13	Anhydrite
3615	3641	26	Salt
3641	3676	35	Anhydrite
3676 Total Depth.			