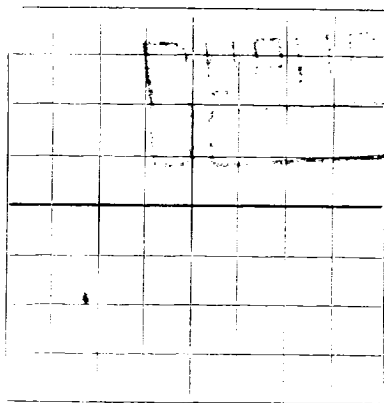


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Wilson Oil Company
(Company & Operator)Shell-State
(Lease)

Well No. 14, in NW 1/4 of NE 1/4, of Sec. 7, T. 21, R. 35, NMPM.

Wilson Pool, Lea County.

Well is 1370 feet from south line and 112 feet from west line of Section 7. If State Land the Oil and Gas Lease No. is B-11610.

Drilling Commenced August 22, 1952. Drilling was Completed October 14, 1952.

Name of Drilling Contractor Company Tools

Address

Elevation above sea level at Top of Tubing Head 3692. The information given is to be kept confidential until , 19--.

OIL SANDS OR ZONES

No. 1, from 3805 to 343. No. 4, from to.

No. 2, from to. No. 5, from to.

No. 3, from to. No. 6, from to.

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 340 to 350 feet. 4 bailers per hour

No. 2, from 875 to 885 feet. 3 bailers per hour

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
16"	20	New	115	Texas			cave string
13"	48	Used	659	"			" "
8 5/8"	28	Used	2882	"			blue mud
7"	20	New	3661	Haliburton			oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
22"	16"	127	---	Haliburton		Aquagel
15 1/8"	13"	659	---	"		"
10"	8 5/8"	2882	---	"		"
8"	7"	3661	400	"		"

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from.....feet to.....feet, and from.....feet to.....feet.
Cable tools were used from.....0.....feet to.....3843.....feet, and from.....feet to.....feet.

PRODUCTION

Put to Producing.....10-15....., 1952.....

OIL WELL: The production during the first 24 hours was.....144*.....barrels of liquid of which.....100.....% was
was oil;% was emulsion;Trace.....% water; and.....% was sediment. A.P.I.

Gravity.....#.....

* Based on last 5 hours of 12 hour test

GAS WELL: The production during the first 24 hours was.....M.C.F. plus.....barrels of
liquid Hydrocarbon. Shut in Pressure.....lbs.

Length of Time Shut in.....

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.....1200	T. Devonian.....	T. Ojo Alamo.....
T. Salt.....	T. Silurian.....	T. Kirtland-Fruitland.....
B. Salt.....3280	T. Montoya.....	T. Farmington.....
T. Yates.....3481	T. Simpson.....	T. Pictured Cliffs.....
T. 7 Rivers.....	T. McKee.....	T. Menefee.....
T. Queen.....	T. Ellenburger.....	T. Point Lookout.....
T. Grayburg.....	T. Gr. Wash.....	T. Mancos.....
T. San Andres.....	T. Granite.....	T. Dakota.....
T. Glorieta.....	T.	T. Morrison.....
T. Drinkard.....	T.	T. Penn.....
T. Tubbs.....	T.	T.
T. Abo.....	T.	T.
T. Penn.....	T.	T.
T. Miss.....	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	125	125	Sand	3722	3739	17	Grey sandy lime
125	330	205	Red Beds	3739	3747	8	Grey sand
330	395	65	Sand	3747	3759	12	Grey sandy lime
395	805	10	Red Beds	3759	3769	10	Grey sandy lime,
805	915	10	Sandy Shale & Sand				oil show
915	1698	783	Red rock, sand, sandy shale	3769	3779	10	Sand, oil & gas show
1698	1840	142	Anhydrite	3779	3840	61	Grey sandy lime
1840	1935	95	Salt & potash	3840	3843	3	Lime, oil stained, pay zone
1935	1960	25	Anhydrite				
1960	2885	925	Salt & potash				
2885	2903	18	Blue mud & anhydrite				
2903	3092	189	Salt				
3092	3137	45	Anhydrite				
3137	3294	157	Salt				
3294	3402	108	Anhydrite				
3402	3458	56	Lime & anhydrite				
3458	3481	23	Grey lime				
3481	3527	46	Lime & anhydrite				
3527	3650	123	Lime, anhydrite, red sand				
3650	3680	30	White & grey lime				
3680	3702	22	Red sand				
3702	3709	7	Grey sandy lime				
3709	3722	13	Grey sand, oil stained				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far
as can be determined from available records.

October 28, 1952 (Date)

Company or Operator.....Wilson Oil Company.....

Address.....Box 1436, Artesia, New Mexico.....

Name.....N. Raymond Lamb.....

Position or Title.....Vice-President.....