


DUPLICATE

FORM C-105

N

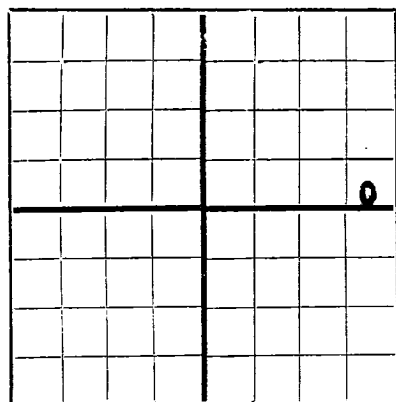


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Resler & Sheldon

Company or Operator

Address

Cities Service State Well No. 1 in SE NE of Sec. 8 T. 21 S

Lease

R. 35 E N. M. P. M. Wilson Field, Lea County.

Well is 2310 feet south of the North line and 330 feet west of the East line of Section 8

If State land the oil and gas lease is No. B-1481 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Address

Drilling commenced June 10, 19 51 Drilling was completed July 28, 51

Name of drilling contractor R. A. Thomas Address Artesia New Mexico

Elevation above sea level at top of casing 3630 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from none to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from none to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	28	8		1335	T.P.				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8 5/8	1335	50	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment none

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 1335 feet, and from feet to feet

Cable tools were used from 1335 feet to 3549 feet, and from feet to feet

PRODUCTION

Put to producing, 19

The production of the first 24 hours was none barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

John O'Brien Driller

Marvin Emmons Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 23rd

day of July, 19 51

Theda Smith
Notary Public

My Commission expires March 7, 1951

Artesia, New Mexico July 23, 1951

Name V. P. Sheldon

Position Partner

Representing Resler & Sheldon

Address Carper Building, Artesia, New Mexico.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1755		red rock and sand
1755	1875		anhydrite
1875	1900		dolomite
1900	1950		anhydrite
1950	2025		salt
2025	2070		anhydrite and salt
2070	2150		salt
2150	2165		anhydrite
2165	2240		salt
2240	2280		anhydrite
2280	2340		anhydrite with a few lime shells
2340	2400		anhydrite and sand