


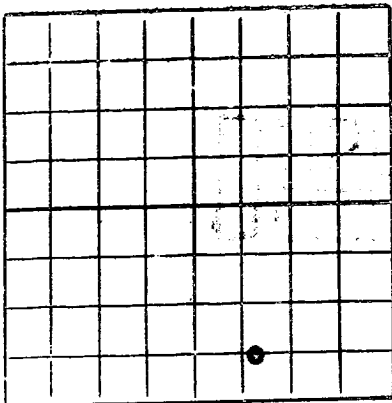

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

John M. Kelly (Company or Operator) Amerada State
Well No. 2, in SW 1/4 of SE 1/4, of Sec. 24, T. 21S, R. 35E, NMPM.
Eumont Pool, Lea County.
Well is 660 feet from South line and 1650 feet from East line of Section 24. If State Land the Oil and Gas Lease No. is E-392.
Drilling Commenced November 13, 1955. Drilling was Completed December 1, 1955.
Name of Drilling Contractor Gackle Drilling Company
Address Hobbs, New Mexico
Elevation above sea level at Top of Tubing Head 3633 DP. The information given is to be kept confidential until Not Confidential, 19.

OIL SANDS OR ZONES

No. 1, from 3864 to 3900 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
9-5/8	36	New	310	Guide			
5-1/2	15.5	New	3940	Float		3862-70; 3888-3900	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	9-5/8	310	300	HOWCO Plug		
7-7/8	5-1/2	3940	250	HOWCO Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Control Frac w/10,000 gals. - 10,000# - 1#/gal. Adomite
Result of Production Stimulation Flow 45 BOPD 20/64" Ch.
Depth Cleaned Out

ORD OF DRILL-STEM AND SPECIAL TES

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3940 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing December 1, 1955

OIL WELL: The production during the first 24 hours was 45 barrels of liquid of which 100 % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity 35° API

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy. 1680	T. Devonian	T. Ojo Alamo
T. Salt. 1890	T. Silurian	T. Kirtland-Fruitland
B. Salt. 3230	T. Montoya	T. Farmington
T. Yates. 3470 (-163)	T. Simpson	T. Pictured Cliffs
T. 7 Rivers. 3748 (-115)	T. McKee	T. Menefee
T. Queen	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash.	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1680	1680	Caliche, Surface sands and Red bed				
1680	1890	210	Anhydrite				
1890	3230	1440	Salt w/Anhydrite stringers				
3230	3500	270	Anhydrite, Dolomite				
3500	3940	440	Anhydrite, sandy dolomite, sand stringers.				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far
as can be determined from available records.

December 20, 1955

(Date)

Company or Operator John M. Kelly

Address Box 5671, Roswell, New Mexico

Name Kenneth D. McEachern

Position or Title Production Superintendent