

P. 1980

Hobbs, NM 88241

Form 3160-5  
(June 1990)UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993  
5. Lease Designation and Serial No.

## SUNDRY NOTICES AND REPORTS ON WELLS

1997 JUL 11 A

LC 031740B

6. If Indian, Allottee or Tribe Name

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.

BUREAU OF LAND MGMT.

ROSSELL OFFICE

7. Unit or CA, Agreement Designation

## SUBMIT IN TRIPLICATE

## 1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

## 2. Name of Operator

Conoco, Inc.

## 3. Address and Telephone No.

10 Desta Drive, Suite 100W, Midland, TX 79705

## 4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

2124' FNL &amp; 1980' FEL

Sec. 4, T-21S, R-36E

## 8. Well Name and No.

Meyer B-4 #20

## 9. API Well No.

30-025-04481

## 10. Field and Pool, or Exploratory Area

## 11. County or Parish, State

Lea, NM

## 12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

## TYPE OF SUBMISSION

- ☒
- Notice of Intent
- 
- ☐
- Subsequent Report
- 
- ☐
- Final Abandonment Notice

## TYPE OF ACTION

- ☒
- Abandonment
- 
- ☐
- Recompletion
- 
- ☐
- Plugging Back
- 
- ☐
- Casing Repair
- 
- ☐
- Altering Casing
- 
- ☐
- Other

- ☐
- Change of Plans
- 
- ☐
- New Construction
- 
- ☐
- Non-Routine Fracturing
- 
- ☐
- Water Shut-Off
- 
- ☐
- Conversion to Injection
- 
- ☐
- Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

## 13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

NOTE: Extensive efforts to recover the tubing fish have been unsuccessful.  
\$56,500 were spent in this effort.

1. Set a cement retainer at 5250'. Squeeze 100 sxs cement into perfs at 5900-20'. Leave 10 sxs cement on top of retainer.
2. Circulate hole with mud.
3. Spot 25 sxs cement 4500-4750'.
4. Spot 25 sxs cement 2350-2600'.
5. Perforate 5 1/2" casing at 1380'. Set a cement retainer at 1280'. Squeeze 30 sxs cement through perfs at 1380'.
6. Perforate 5 1/2" casing at 350'. Circulate 90 sxs cement to surface.
7. Install dryhole marker and clean location.

## 14. I hereby certify that the foregoing is true and correct

Signed

*Jim Hoover*

Title

Sr. Conservation Coordinator

Date

7/11/97

(This space for Federal or State office use)

Approved by

JORG. SGD.) DAVID R. GLASS

Title

PETROLEUM ENGINEER

Date

JUL 15 1997

Conditions of approval, if any:


SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or representations as to any matter within its jurisdiction.

# CURRENT WELLBORE

6/17/97

Elev. = 3535' GL +11' KB

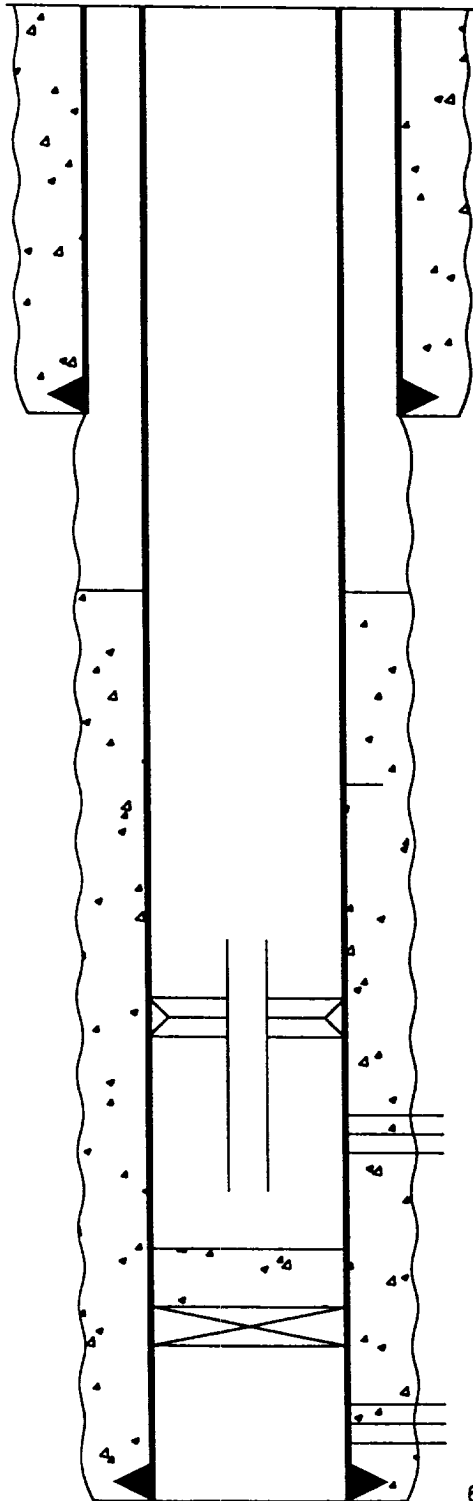

1330' - 8 5/8" Casing. Cemented w/450 sxs. Circulated to Surface

T.O.C. @ 2400' (Temp. Survey)

Casing Leak Sqzd 4607'-4671'

Top of Fish @ 5279'

2 3/8" Tubing 5279'-5950'

Tubing Anchor @ 5858'

Perfs 5900'-5920'

C.I.B.P. @ 6220' W/35' Cement

Perfs 6236'-6246'

6271' - 5 1/2" Casing. Cemented w/720 sxs

T.D. @ 6271'

CONOCO, INC.

Meyer B-4 #20


2124' FNL & 1980' FEL

Sec. 4, T-21S, R-36E

# PROPOSED PLUG AND ABANDONMENT

6/17/97

Elev. = 3535' GL +11' KB

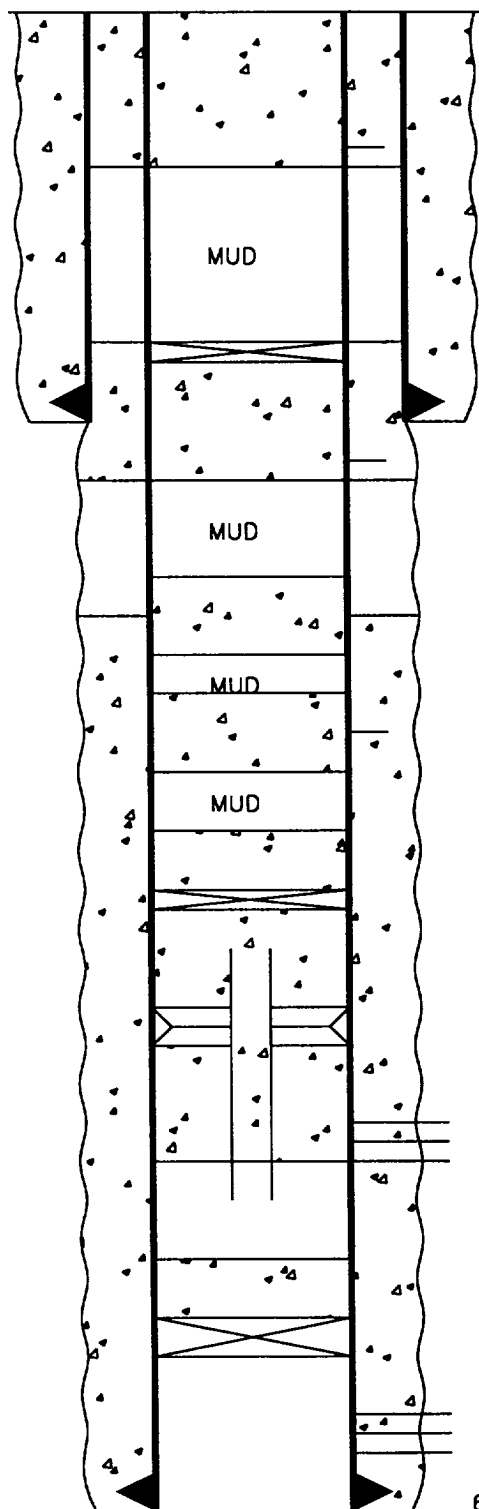

PERFORATE @ 350' AND CIRCULATE 90 SXS CEMENT TO SURFACE

SET RETAINER @ 1280'. SQZ. 30 SXS CEMENT  
THRU PERFS @ 1380'

1330' - 8 5/8" Casing. Cemented w/450 sxs. Circulated to Surface  
PERFORATE @ 1380'

SPOT 25 SXS CEMENT 2350'-2600'  
T.O.C. @ 2400' (Temp. Survey)

SPOT 25 SXS CEMENT 4500'-4750'  
Casing Leak Sqzd 4607'-4671'

SET RETAINER @ 5250'. SQZ 100 SXS CEMENT INTO PERFS 5900'-20'  
LEAVE 10 SXS CEMENT ON TOP OF RETAINER  
Top of Fish @ 5279'  
2 3/8" Tubing 5279'-5950'  
Tubing Anchor @ 5858'

Perfs 5900'-5920'

C.I.B.P. @ 6220' W/35' Cement

Perfs 6236'-6246'

6271' - 5 1/2" Casing. Cemented w/720 sxs

T.D. @ 6271'

CONOCO, INC.

Meyer B-4 #20

2124' FNL & 1980' FL

Sec. 4, T-21S, R-36E

Lea County, NM