


N.

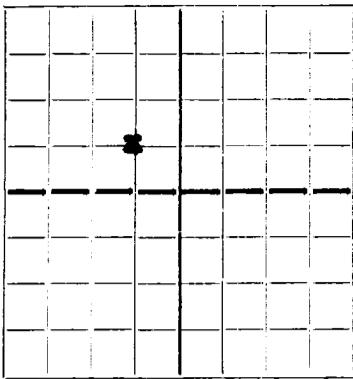

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO STATE LAND OFFICE

SANTA FE, NEW MEXICO

DEPARTMENT OF THE STATE GEOLOGIST

WELL RECORD

Mail to State Geologist, Santa Fe, New Mexico, not more than ten days
after completion of well. Indicate questionable data by
following it with (?). Submit in duplicate.

Company Gypsy Oil Company Address Tulsa, Oklahoma.
Send correspondence to Gypsy Oil Company Address Hobbs, New Mexico.
H.T. Orentt Well No. 1 in N^W/4 of Sec. 5, T. 21s
R. 36e, N. M. P. M., Lincoln Oil Field Loa County.
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is H.T. Orentt Address Hobbs, New Mexico.
The lessee is Gypsy Oil Company Address Tulsa, Oklahoma.
If not state or patented land, give status _____
Drilling commenced July 24, 19 35 Drilling was completed Early Sept 18 19 35
Name of Drilling contractor Lo Gypsy Oil Company Address Tulsa, Oklahoma.
Elevation above sea level at top of casing 3590' feet.
The information given is to be kept confidential until Not Confidential. 19 _____

OIL SANDS OR ZONES

No. 1, from 3707 to 3890' No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	Purpose
<u>10 3/4"</u>	<u>40#</u>	<u>8</u>	<u>Steel</u>	<u>355'</u>	<u>None</u>		<u>Protect Surface</u>	<u>Inter.</u>
<u>7-5/8"</u>	<u>26#</u>	<u>8</u>	<u>SS</u>	<u>2719'</u>	<u>Halliburton</u>		<u>Protect Salt.</u>	
<u>5-1/2"</u>	<u>17#</u>	<u>10</u>	<u>SS</u>	<u>3718'</u>	<u>Halliburton</u>		<u>Oil String.</u>	

MUDDING AND CEMENTING RECORD

SIZE	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>10 3/4"</u>	<u>355'</u>	<u>250 Sack</u>	<u>Halliburton</u>		
<u>7-5/8"</u>	<u>2719'</u>	<u>325 Sack</u>	<u>Halliburton</u>		
<u>5-1/2"</u>	<u>3718'</u>	<u>15 Sack</u>	<u>Halliburton</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

SIZE	SHELL USED	EXPLOSIVE USED	QUANTITY	DATED	DEPTH SHOT	DEPTH CLEANED OUT

TOOLS USED

Rotary tools were used from 0 feet to 3890' feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing October 1st 19 35
The production of the first 24 hours was 297 barrels of fluid of which 100% % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be. 34.1
If gas well, cu. ft. per 24 hours 500,000 Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Arthur Hale Driller W.J. Berlin Driller
F.A. Humfelt Driller B.C. Warren Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 3rd day of October, 19 35
John P. Curran Notary Public, My commission expires _____
Name D. D. Cummings Position District Superintendent
Representing Gypsy Oil Company Company or Operator.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	294		Surface Sand
294	358		Red Bed
358	516		Red Bed & Blue Shale
516	760		Shale
760	807		Anhydrite & Shale
807	1050		Red Bed & Shale
1050	1214		Red Bed & Anhydrite
1214	1235		Red Bed & Anhydrite
1235	1528		Salt & Anhydrite
1528	1984		Anhydrite & Shale
1984	2371		Salt & Anhydrite
2371	2590		Salt & Anhydrite
2590	2607		Anhydrite (Sticky)
2607	2722		Anhydrite
2722	2840		Anhydrite
2840	2860		Brown Shale
2860	2918		Anhydrite
2918	2955		Brown
2955	3025		Lime
3025	3069		Brown Lime
3069	3098		Lime
3098	3128		Brown Lime
3128	3158		Lime
3158	3174		Lime
3174	3202		Corrected Steel Line Measure
3202	3223		Brown Lime
3223	3280		Lime (Gassie)
3280	3406		Lime
3406	3480		Lime
3480	3483		Lime
3483	3565		Lime
3565	3570		Lime
3570	3579		Brown Lime
3579	3589		Dark Gray Sandy Lime
3589	3606		Lime & Shale
3606	3890		Lime
			Total Depth.