

Santa Fe, New Mexico


# DEPARTMENT OF THE STATE GEOLOGIST

## NOTICE OF INTENTION TO DRILL NEW WELL

Notice must be given to the State Geologist or to the proper Oil and Gas Inspector and approval obtained before drilling begins. If changes in the proposed plan are considered advisable a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval.

Mr. E. H. Wells, State Geologist. Hobbs N. Mex., 7/3 1934.

Dear Sir: You are hereby notified that it is our intention to commence the drilling of a well to be known as State A-1350 Well No. 2 in NE 1/4 of Sec. 8 T. 21 S., R. 36 E., N. M. P. M., Eunice Oil Field Lea County

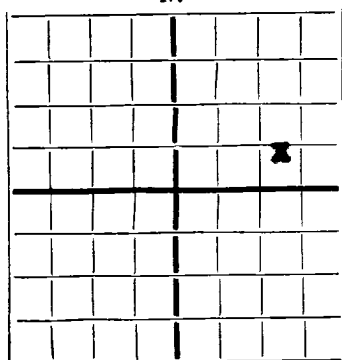

AREA 640 ACRES  
LOCATE WELL CORRECTLY

The well is 1980 feet <sup>(N.)</sup> North line and 660 feet <sup>(E.)</sup> East Line <sup>(W.)</sup>

of \_\_\_\_\_ line of \_\_\_\_\_  
(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. A-1350  
Assignment No. \_\_\_\_\_

If patented land the owner is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is Tide Water Oil Company Address Tulsa, Okla.

The elevation of the derrick floor above sea level is 3592 feet. We propose to drill well with No. Rotary Make of Drill \_\_\_\_\_

We propose to use the following strings of casing and to land or cement them as indicated.

| Size of Casing | Weight Per Foot | New or Second Hand | Depth       | Landed or Cemented |
|----------------|-----------------|--------------------|-------------|--------------------|
| <u>12 1/2</u>  | <u>50</u>       | <u>S.H.</u>        | <u>300</u>  | <u>Cemented</u>    |
| <u>9-5/8</u>   | <u>36</u>       | <u>New</u>         | <u>2900</u> | <u>Cemented</u>    |
| <u>7"OD</u>    | <u>24</u>       | <u>New</u>         | <u>3800</u> | <u>Cemented</u>    |

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3850 feet.  
Additional information: **DUPLICATE**

12 1/2" casing to be set thru water sand and cemented to top  
9-5/8" to be set thru salt and sufficient cement used to protect salt.  
7"OD to be set thru gas above pay and sufficient used to completely shut off upper gas

Sincerely yours,

Approved JUL 6 - 1934, 19\_\_\_\_\_

Except as follows:

Tide Water Oil Company  
Company or Operator.

By F. Schneider

Position Production Superintendent  
Send communication regarding well to

Name F. Schneider

Address Hobbs, New Mexico

State Geologist or Oil and Gas Inspector.

Copy Returned 7-6-34

100-9-8-86

**EL**

C87