


N.

NEW MEXICO OIL CONSERVATION COMMISSION Santa Fe, New Mexico

WELL RECORD

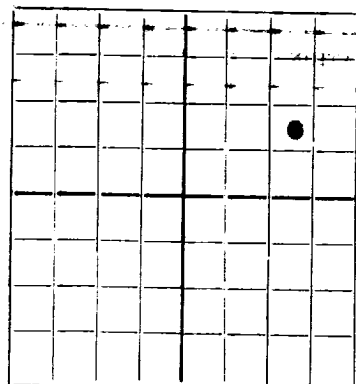

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

REMOLLO OIL COMPANY

E.C. Adams

Company or Operator

Well No. **5** in **NE/4** of Sec. **9** Lease **21-3**

R. **34-E**, N. M. P. M., **Barrios** Field, **100** County.

Well is **1450** feet south of the North line and **990** feet west of the East line of **Sec. 9-21-36**

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is **Ernest C. Adams**, Address **?**

If Government land the permittee is _____, Address _____

The Lessee is _____, Address _____

Drilling commenced **January 18th** 19 **36** Drilling was completed **March 16th** 19 **36**

Name of drilling contractor **Hoble Drilling Co.**, Address **Tulsa, Oklahoma**

Elevation above sea level at top of casing **3601'** feet.

The information given is to be kept confidential until _____ 19 _____.

OIL SANDS OR ZONES

No. 1, from _____ to _____ No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.

No. 2, from _____ to _____ feet.

No. 2, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
15 1/2	70 1/2	8	?	221'	None				
10 1/2	40 1/2	8	?	1482'	Comb. float				
7	24 1/2	10	?	3787'	"	"			
150 1/2"	6.84	11 1/2		3663'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
19 5/8	15 1/2	241'	200	Halliburton	?	?
13 3/8	10 1/2	1499'	500	"		
8 3/4	7	3605'	325	"		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3896** feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **March 16th** 19 **36**

The production of the first **24** hours was **30 bbls. per hr.** barrels of fluid of which **100** % was oil; _____ %

emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

T.L. Kinney

Jerry Holt

R.C. Lindsay

Driller _____, Driller _____

Driller _____, Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **19**

Hobbs, New Mexico

March 18th, 1936.

day of **April**, 19 **36**

Name **G. Ralph Wright** **Geoff Wright**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	220	220	Sand & Shells
220	529	309	Red Bed
529	984	455	Red Bed & Shells
984	1060	76	Red Bed & Shale
1060	1262	202	Red Bed & Shells
1262	1320	58	Red Rock & Shale
1320	1377	57	Brown & Red Shale
1377	1440	63	Anhydrite
1440	1466	26	Shale
1466	1482	16	Anhydrite
1482	1512	30	Anhydrite & Salt
1512	1667	155	Salt
1667	1914	247	Anhydrite & Salt
1914	2035	121	Salt
2035	2177	142	Salt, Anhydrite Shells
2177	2330	153	Salt & Anhydrite
2330	2565	235	Salt & Anhydrite Shells
2565	2610	45	Anhydrite
2610	2640	30	Brown Lime & Anhydrite
2640	2703	63	Anhydrite
2703	2745	42	Anhydrite & Brown Lime w/streaks of shale
2745	2790	45	Anhydrite & Lime Shells
2790	2835	45	Anhydrite & Lime
2835	2878	43	Anhydrite & Lime shells
2878	2954	76	Lime & Anhydrite
2954	3015	61	Lime
3015	3015	0	Brown sandy lime
3015	3087	72	Lime
3087	3157	70	Lime & Anhydrite Shells
3157	3299	142	Lime
3299	3340	41	Brown Lime
3340	3376	36	Lime
3376	3413	37	Lime w/streaks of brown sandy lime
3413	3441	28	Brown Lime
3441	3498	57	Lime
3498	3526	28	Hard gray lime
3526	3691	165	Lime
3691	3707	16	Gray & Brown Lime
3707	3856	149	Lime
3856	3890	34	Broken Brown & Gray Lime
3890	3895	5	Brown Lime

TD- 3895