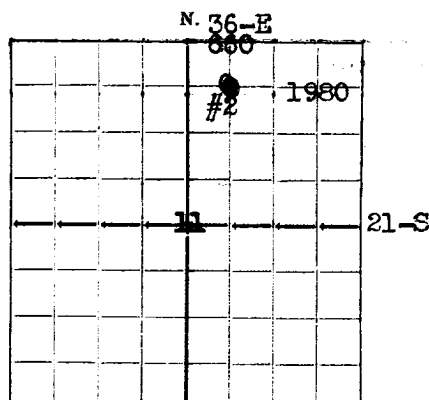


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

RECEIVED
JUL 15 1937

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Stanolind Oil & Gas Co Hobbs, New Mexico
Company or Operator Address
Mrs. R.B. McQuatters Well No. 2 in NE/4 of Sec. 11, T. 21-S
Lease
R. 36-E, N. M. P. M., Eunice Field, Lea County.
Well is 660 feet south of the North line and 1980 feet west of the East line of Section 11
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Mrs. R.B. McQuatters Address Eunice, New Mexico
If Government land the permittee is Address
The Lessee is Stanolind Oil & Gas Co Address Tulsa, Oklahoma.
Drilling commenced June 3 1937 Drilling was completed July 8, 1937
Name of drilling contractor John Menke Address Wichita Falls, Texas
Elevation above sea level at top of casing Derrick Floor 3541 feet.
The information given is to be kept confidential until Not confidential 19

OIL SANDS OR ZONES

No. 1, from 2955 to 2965 S.G. No. 4, from 3806 to 3840 S.G. & O.
No. 2, from 3337 to 3375 S.G. No. 5, from to
No. 3, from 3495 to 3500 S.G. No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13"	40#	8	Rep	277'	Belled			
9-5/8"	36#	8	Nat'l	2527'	Larkin			
7"	22#	10	Nat'l	3651	Larkin			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13"	292'	200	Halliburton		
12 1/2"	9-5/8"	2542'	525	Halliburton		
8-3/4"	7"	3666'	275	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3840 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing July 10, 1937, 19
The production of the first 24 hours was 576 barrels of fluid of which 100 % was oil; %
emulsion; % water; and % sediment. Gravity, Be
Gas 700 MCF cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Ed Findley Driller Don Findley Driller
B.C. Gillespie Driller John Menke Drilling Contractor Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 14th

day of July 1937

Notary Public

My Commission expires

Hobbs, New Mexico 7-15-37

Name Ralph H. Henderson

Position Field Supt.

Representing Stanolind Oil & Gas Co

Address Box F, Hobbs, New Mexico

ORIGINAL

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1265	1265	Surface Sand, red rock and red beds
1265	1372	107	Anhydrite Top Anhydrite 1265
1372	2480	1108	Salt & streaks of red beds and anhydrite Base salt
2480	2726	246	Anhydrite II 2480
2726	2867	141	Lime
2867	2955	88	Anhydrite & lime
2955	2965	10	Sand Show gas
2965	3151	186	Lime
3151	3175	24	Anhydrite & lime
3175	3337	162	Lime
3337	3375	38	Lime w/ streaks of sand Show gas
3375	3485	110	Lime
3485	3495	10	Lime w/ blue shale
3495	3500	5	Lime. w/ streaks of sand Show gas
3500	3725	225	Sandy lime
3725	3806	81	Lime Top pay 3806
3806	3840	34	Sandy lime Total depth Show oil & gas -