

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico.

2/20/37


OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as _____

Tide Water Associated Oil Company **R.M. Marshall** Well No. 1 in **SW of NE 1/4**
Company or Operator Lease Shelly Pay 1948
of Sec. 13, T. 21S, R. 36E, N. M. P. M., Tulsa Field, Lea County.

N.

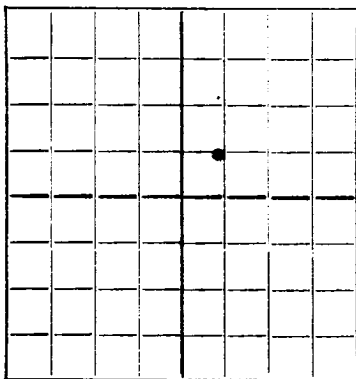

AREA 640 ACRES
LOCATE WELL CORRECTLY

The well is 1940 feet xx [S.] of the North line and 1940 feet xxx [W.] of the East line of Section 13-21S-36E

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is _____

Address _____

If government land the permittee is _____

Address _____

The lessee is Tide Water Associated Oil Company

Address Box 731, Tulsa, Okla.

We propose to drill well with drilling equipment as follows: Rotary

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Tide Water carries blanket bond of \$10,000 w/United States Fidelity and Guaranty Co. as security.

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
15	10-3/4"	40	SH	250	Cemented	250
9-7/8"	7-5/8"	26.40	New	1250	"	500
6-3/4"	5"	17	New	3800	"	300

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3800 feet.

Additional information 10-3/4" Casing will be set through water sand into Red Bed 15' and cemented to surface, 7-5/8" OD Casing will be set just above salt and cemented to surface, 5" OD Casing will be set above pay and 150% of the calculated amount of cement used to cement back to base of salt.

Approved _____ 19____
except as follows:

Sincerely yours,

Tide Water Associated Oil Co.

By F. Schneider - P. E.

Position Prod. Sup't

Send communication regarding well to

Name F. Schneider

Address Drawer KK Hobbs, New Mexico.

OIL CONSERVATION COMMISSION,

By _____
Title _____

