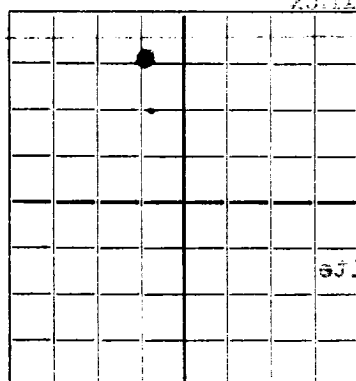


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Drill this hole to
depth of 500 feet
and then 100 feet
more. Submit in triplicate.
Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper
agent within twenty days after completion of well. Follow instructions
in the Rules and Regulations of the Commission. Indicate questionable data
by following it with (?). SUBMIT IN TRIPLICATE.

131
144
151
161
171
181
191
201
211
221
231
241
251
261
271
281
291
301
311
321
331
341
351
361
371
381
391
401
411
421
431
441
451
461
471
481
491
501
511
521
531
541
551
561
571
581
591
601
611
621
631
641
651
661
671
681
691
701
711
721
731
741
751
761
771
781
791
801
811
821
831
841
851
861
871
881
891
901
911
921
931
941
951
961
971
981
991
1001

Gulf Oil Corporation

Henry C. Collins

Company or Operator

Lease

Well No. 2 in NE NW of Sec. 14, T. 21S

R. 36E, N. M. P. M., Eunice Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of NE NW

If State land the oil and gas lease is No. - Assignment No. -

If patented land the owner is - Address -

If Government land the permittee is - Address -

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma.

Drilling commenced 6-24-36 19 Drilling was completed 8-26-36 19

Name of drilling contractor Lee Drilling Company Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 3584 feet.

The information given is to be kept confidential until ? 19

OIL SANDS OR ZONES

No. 1, from 3700 to 3885 No. 4, from - to -

No. 2, from - to - No. 5, from - to -

No. 3, from - to - No. 6, from - to -

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary hole to - feet.

No. 2, from - to - feet.

No. 3, from - to - feet.

No. 4, from - to - feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-5/8	22.75	8	Laguarda	500'				
7-5/8	22	8	"	1450'				
5-1/2	17	10	"	5628'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-5/8	10-5/8	500'	250	Halliburton		
9-7/8	7-5/8	1450'	500	"		
6-5/8	5-1/2	5628'	500	"		

PLUGS AND ADAPTERS

Heaving plug—Material - Length - Depth Set -

Adapters—Material - Size -

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hydrochloric Acid	2000	8-20-36		
		"	5000	8-24-36		

Results of shooting or chemical treatment -

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3885 feet, and from - feet to - feet

Cable toops were used from - feet to - feet, and from - feet to - feet

PRODUCTION

Put to producing 8-1-36 19

The production of the first 24 hours was 254 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be -

If gas well, cu. ft. per 24 hours - Gallons gasoline per 1,000 cu. ft. of gas -

Rock pressure, lbs. per sq. in. -

EMPLOYEES

?, Driller - Driller

, Driller - Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

Tulsa, Oklahoma. Nov. 12th, 1936

day of November, 19 36

Name -

Position - General Superintendent

Representing - Gulf Oil Corporation

100

[illegible]