

DUPLICATE


FORM C-105

N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

RECEIVED JUL 26 1937

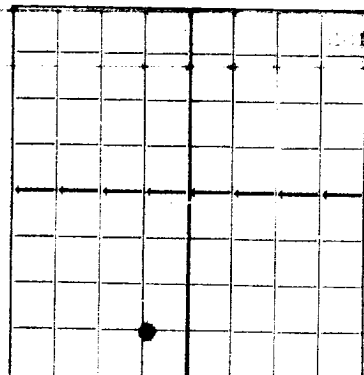

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

Tulsa, Oklahoma

Company or Operator

Address

H.G. Collins

Well No.

of Sec.

14

218

Lease

R. 36E

N. M. P. M.

Runice

Field

Lee

County

Well is 1900 feet south of the North line and 660 feet west of the East line of 36E 218

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma

Drilling commenced 5-18-1937 Drilling was completed 7-7-1937

Name of drilling contractor Lee Drilling Co. Address Tulsa, Oklahoma

Elevation above sea level at top of casing 5500 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 5745' to 5865' No. 4, from to
No. 2, from Pay 5765' to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary Hole to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13-5/8	27.8	8	Arco	30'				
7-5/8	22	8	Lapw.	1574				
5-1/2	17	10	**	5696				
** Bottom 54 joints South Chester Lapweld, top 77 jts. Seamless.								

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13"	13-5/8	30'	40	By hand		
9-7/8	7-5/8	1574	600	Halliburton		
8-5/4	5-1/2	5696	150	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
2 1/2"	Plain	Glycerin	180 qts.	6-30-37	5865'	5865'
		Hydrochloric Acid	2000 gal.	6-21-37	5865'	

Results of shooting or chemical treatment Before acidizing well made one flow of approximately 20 barrels; never went on proration schedule. Showing small amount of gas, but no oil, when shut down.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 5865' feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Never produced 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 22

Tulsa, Oklahoma

July 22, 1937

day of May, 1937

Name R. D. Adams

Position General Superintendent

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	100'		Galechi & sand
	195		Sand
	255		Red bed
	380		Red bed & shells
	510		Red bed
	1070		Red bed & shells
	1180		Red bed
	1545		Red bed & shells
	1480		Anhydrite
	1480		Salt
	1600		Salt & Anhydrite
	1750		Salt & shells
	1800		Salt & Anhydrite
	2425		Salt & shells
	2500		Salt
	2605		Anhydrite
Total Depth	2685		Brown line
FORMATION TOPS			
<div> <div>100'</div> <div>195'</div> <div>255'</div> <div>380'</div> <div>510'</div> <div>1070'</div> <div>1180'</div> <div>1545'</div> <div>1480'</div> <div>1480'</div> <div>1600'</div> <div>1750'</div> <div>1800'</div> <div>2425'</div> <div>2500'</div> <div>2605'</div> <div>2685'</div> </div>			