

NEW MEXICO STATE LAND OFFICE


Santa Fe, New Mexico

DEPARTMENT OF THE STATE GEOLOGIST
NOTICE OF INTENTION TO DRILL NEW WELL

Notice must be given to the State Geologist or to the proper Oil and Gas Inspector and approval obtained before drilling begins. If changes in the proposed plan are considered advisable a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval.

Mr. E. H. Wells, State Geologist. Hobbs N. Mex. Mar 15th 1934

Dear Sir: You are hereby notified that it is our intention to commence the drilling of a well to be known as O. L. Coleman Well No. 2 in NE¹ of Sec. 17 T. 21s, R. 36e, N. M. P. M., Eunice Oil Field Leas County

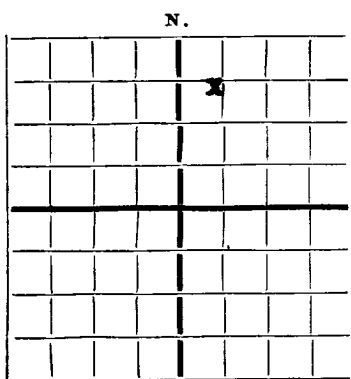

AREA 640 ACRES
LOCATE WELL CORRECTLY

The well is 660' feet XXXX of North line and 1980' feet XXXX (W.) of East line of Sec 17-21s-36e

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. _____
Assignment No. _____

If patented land the owner is O. L. Coleman

Address Canyon, Texas - 1st Nat'l Bank

The lessee is Tide Water Oil Company Address Hobbs, New Mexico

The elevation of the derrick floor above sea level is 3618' feet. We propose to drill well with No. Rotary

Make of Drill _____

We propose to use the following strings of casing and to land or cement them as indicated.

| Size of Casing | Weight Per Foot | New or Second Hand | Depth | Landed or Cemented |
|--|---|--|---|---|
| <u>12 1/2"</u> <u>15 1/2"</u> <u>9-5/8" OD</u> <u>7" OD</u> | <u>50</u> <u>70#</u> <u>36#</u> <u>24#</u> | <u>SH</u> <u>New & SH</u> <u>New</u> | <u>300'</u> <u>2900'</u> <u>3900'</u> | <u>Cemented</u> <u>"</u> <u>"</u> |

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3900' feet.
Additional information:

We intend to cement 9-5/8" casing with sufficient cement to protect salt, set 7" through big gas above pay horizon and use sufficient cement to shut off most of this gas if encountered. 15 1/2" surface string to be set through surface water and cemented to top.

Sincerely yours,

Approved MAR 16 1934, 19_____
Except as follows:

TIDE WATER OIL COMPANY

Company or Operator.

By F. Schneider

Position Production Superintendent

Send communication regarding well to

Name F. Schneider

Address Hobbs, New Mexico

State Geologist or Oil and Gas Inspector.

[Signature]