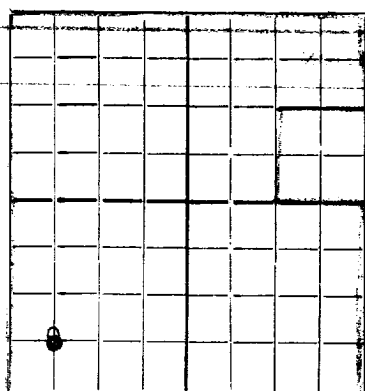


N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

1007

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gypsy Oil Company

Arnett-Ramsay-C

Company or Operator

Lease

Well No. 1 in SW of Sec. 21, T. 21SR. 36E, N. M. P. M., Eunice Field, Lea County.Well is 660 feet south of the North line and 660 feet west of the East line of SW/4 of SW/4If State land the oil and gas lease is No. B-229 Assignment No. \_\_\_\_\_

If patented land the owner is \_\_\_\_\_ Address \_\_\_\_\_

If Government land the permittee is \_\_\_\_\_ Address \_\_\_\_\_

The Lessee is Gypsy Oil Company Address Tulsa, Oklahoma.Drilling commenced 10-15-35 19\_\_\_\_ Drilling was completed 11-17-35 19\_\_\_\_Name of drilling contractor Loffland Bros. Address Tulsa, Oklahoma.Elevation above sea level at top of casing 3603 feet.

The information given is to be kept confidential until \_\_\_\_\_ ? \_\_\_\_\_ 19\_\_\_\_.

## OIL SANDS OR ZONES

No. 1, from 3730' to 3900' No. 4, from \_\_\_\_\_ to \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from ? to \_\_\_\_\_ feet. \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet. \_\_\_\_\_

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
10-3/4"	40	10	Lap.	250'	?				
7-5/8"	26	8	Seam.	1509'	?				
5-1/2"	17	10	Seam.	3797'	?				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13 3/4"	10 1/2"	250'	250	Halliburton		
9-7/8"	7-5/8"	1509'	400	"		
6-3/4"	5 1/2"	3797'	350	"		

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_

Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment \_\_\_\_\_

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 3900 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

## PRODUCTION

Put to producing November 16, 19 35The production of the first 24 hours was 880 barrels of fluid of which \_\_\_\_\_ % was oil; \_\_\_\_\_ %

emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_

If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

\_\_\_\_\_, Driller \_\_\_\_\_, Driller

\_\_\_\_\_, Driller \_\_\_\_\_, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 30day of November, 1935\_\_\_\_\_  
Notary Public.Tulsa, Oklahoma. Nov. 30, 1935Name Dr. SanderPosition General SuperintendentRepresenting Gypay Oil Company

Company or Operator

My Commission expires March 16, 1937

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	160'		Coleache and sand
	342		Sand and shells
	344		Sand and shells
	419		Red Bed
	547		Sand and shells
	869		Red Bed
	1214		Red Bed and shells.
	1435		Red Bed and Anhydrite
	1527		Red rock and shells.
	1535		Salt
	1661		Salt and Anhydrite shells
	1771		Salt and Anhydrite
	1800		Salt
	1812		Anhydrite
	1842		Salt
	1849		Anhydrite
	1879		Salt
	1895		Anhydrite
	1882		Salt and Anhydrite shells
	2155		Salt
	2166		Anhydrite
	2201		Salt
	2215		Anhydrite
	2340		Salt
	2348		Anhydrite
	2415		Salt
	2420		Anhydrite
	2431		Salt
	2440		Anhydrite
	2445		Salt
	2461		Anhydrite
	2542		Salt and shells
	2548		Anhydrite
	2601		Salt and shells
	2654		Salt
	2674		Anhydrite
	2687		Salt
	2710		Anhydrite
	2781		Salt
	2790		Salt and shells
	2830		Anhydrite
	2854		Anhydrite
	3007		Anhydrite
	3041		Anhydrite and lime shells
	3049		Lime (Gas)
	3077		Anhydrite
	3150		Lime
	3155		Lime - soft
	3170		Lime
	3178		Anhydrite
	3900		Lime