


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

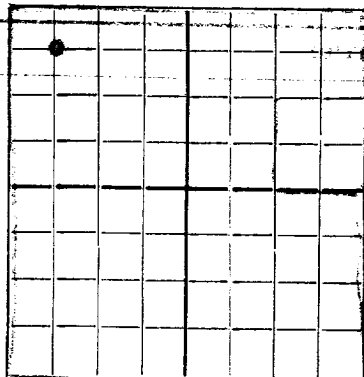

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gy sy Oil Company

Arnott-Ramsay-C

Company or Operator

Lease

Well No. 2 in NW NW of Sec. 21 T. 21S

R. 36E, N. M. P. M., Eunice Field, Lea County.

Well is 660 feet south of the North line and 660 feet east of the East line of NW NW

If State land the oil and gas lease is No. B-229 Assignment No.

If patented land the owner is - Address

If Government land the permittee is - Address

The Lessee is Gy sy Oil Company Address Tulsa, Oklahoma.

Drilling commenced Nov. 17th, 1935 Drilling was completed Dec. 27th, 1935

Name of drilling contractor Loffland Bros. Address Tulsa, Oklahoma.

Elevation above sea level at top of casing 3632 feet.

The information given is to be kept confidential until 7 19

OIL SANDS OR ZONES

No. 1, from 3785 to 3924 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary hole to feet.

No. 2, from to feet.

No. 2, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10-3/4	40	8	Lap.	350'					
7-5/8	26	8	Seam.	1462'					
5-1/2	17	10	Seam.	3794'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-5/4	10-3/4	350'	250	Halliburton		
9-7/8	7-5/8	1462'	350	"		
6-3/4	5-1/2	3794'	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3924' feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing Dec. 27th, 1935, 19

The production of the first 24 hours was 959 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 8th,

Tulsa, Oklahoma, January 8th, 1936

day of January, 1936

Name

Position General Superintendent

Representing Gy sy Oil Company Company or Operator

Address

Notary Public.

My Commission expires March 16, 1936

FORMATION RECORD

FORMATION		THICKNESS IN FEET	TO	FROM
Calcecht and sand			294'	0'
Broken sand and clay			315	
Red rock			362	
Red Bed and shells			816	
Red rock and shale			921	
Red rock and sand			1060	
Red rock and shells			1150	
Red rock and shale			1247	
Red rock			1367	
Red rock and shale			1390	
Anhydrite			1473 ²	
Salt			1478	
Salt and anhydrite			1834	
Anhydrite			1854	
Anhydrite and salt			1944	
Salt and anhydrite			2827	
Gyp and Anhydrite			2850	
Anhydrite			3006	
Lime			3096	
Lime and anhydrite			3150	
3231			3150	
Lime			3785	
Upper San Andreas			3924	