


N.

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

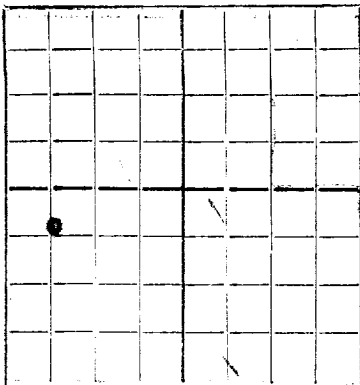

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Gypsy Oil Company Arnott-Ramsay-C  
Company or Operator Lease

Well No. 5 in NW SW of Sec. 21, T. 21S  
R. 36E, N. M. P. M., Eunice Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of NW SW

If State land the oil and gas lease is No. B-229 Assignment No. \_\_\_\_\_

If patented land the owner is \_\_\_\_\_ Address \_\_\_\_\_

If Government land the permittee is \_\_\_\_\_ Address \_\_\_\_\_

The Lessee is Gypsy Oil Company Address Tulsa, Oklahoma.

Drilling commenced 12-1-35 19\_\_\_\_ Drilling was completed 1-18-36 19\_\_\_\_

Name of drilling contractor Sparkman & Reusch Address Tulsa, Oklahoma

Elevation above sea level at top of casing 3599 feet.

The information given is to be kept confidential until ? 19\_\_\_\_

OIL SANDS OR ZONES

No. 1, from 3750 to 3898 No. 4, from \_\_\_\_\_ to \_\_\_\_\_

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_

No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary tools to \_\_\_\_\_ feet.

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet.

No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet.

No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	40	8	Lapweld	362'	?			
7-5/8	26	8	Seam.	1467'				
5-1/2	17	10	Seam.	3774'				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-3/4	362'	250	Halliburton		
9-7/8	7-5/8	1467'	325	"		
6-3/4	5-1/2	3774	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_

Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
			NONE			

Results of shooting or chemical treatment \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3898' feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

Cable tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

PRODUCTION

Put to producing 1-18-36 19\_\_\_\_

The production of the first 24 hours was 968 barrels of fluid of which \_\_\_\_\_ % was oil; \_\_\_\_\_ % emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_

If gas well, cu. ft. per 24 hours 1,000,000 Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. 1125#

EMPLOYEES

\_\_\_\_\_, Driller \_\_\_\_\_, Driller

\_\_\_\_\_, Driller \_\_\_\_\_, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 31st Tulsa, Oklahoma January 23th, 1936

day of January, 1936 Name D. R. Sanderson

Notary Public. Position General Superintendent

My Commission expires March 6 1936 Representing Gypsy Oil Company

Address Tulsa, Oklahoma.

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	73'		Sand
	196		Sand and shells
	295		Red Rock
	390		Shells and red rock
	432		Red Rock
	508		Shells and red rock
	729		Red Bed
	872		Red Rock
	945		Red Bed and shells
	1008		Red Bed and Anhydrite
	1500		Anhydrite
	1630		Salt and Potash
	1692		Anhydrite and salt
	1766	Salt and	Anhydrite
	1883		Salt and Potash
	1995		Salt and Anhydrite
	2135		Salt and Anhydrite
	2345		Salt and Anhydrite
	2623		Anhydrite and Salt
	2628		Anhydrite
	2820		Salt and Anhydrite
	2883		Lime
	2907		Lime rock
	2987		Lime
	3750		Lime
	3898		Upper San Andreas