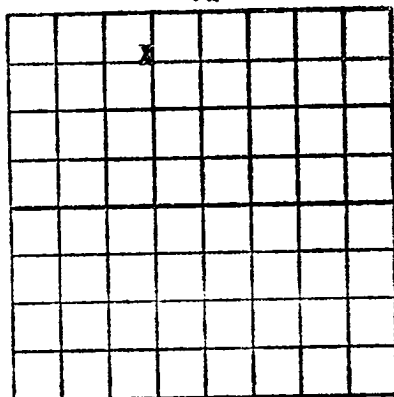


N.

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
SANTA FE, NEW MEXICO

WELL RECORD

MAIL TO DISTRICT OFFICE, OIL CONSERVATION COMMISSION, TO WHICH FORM C-101 WAS SENT NOT LATER THAN TWENTY DAYS AFTER COMPLETION OF WELL. FOLLOW INSTRUCTIONS IN RULES AND REGULATIONS OF THE COMMISSION. SUBMIT IN QUINTUPPLICATE.

CHANGE OPERATOR NAME FROM

Humble Oil & Refining Company
(COMPANY OR OPERATOR) TO EXXON CORPORATION
HUMBLE OIL & REFINING COMPANY, State of
(LEASE)WELL NO. 16, IN NE 1/4 OF SEC. 1, T. 21-S, R. 36-E, NMPM.
Egmont POOL, Lea COUNTY.WELL IS 660 FEET FROM North LINE AND 1980 FEET FROM West LINE
OF SECTION 26. IF STATE LAND THE OIL AND GAS LEASE NO. IS B-935

DRILLING COMMENCED May 12, 1958 DRILLING WAS COMPLETED May 23, 1958

NAME OF DRILLING CONTRACTOR Gackle Drilling Company, Inc.

ADDRESS 417 Fort Worth National Bank Building, Ft. Worth, Texas

ELEVATION ABOVE SEA LEVEL AT TOP OF TUBING HEAD 3566' DF. THE INFORMATION GIVEN IS TO BE
KEPT CONFIDENTIAL UNTIL Not Confidential, 19

OIL SANDS OR ZONES

NO. 1, FROM 3811 TO 3829 NO. 4, FROM TO
NO. 2, FROM TO NO. 5, FROM TO
NO. 3, FROM TO NO. 6, FROM TO

IMPORTANT WATER SANDS

INCLUDE DATA ON RATE OF WATER INFLOW AND ELEVATION TO WHICH WATER ROSE IN HOLE.

NO. 1, FROM TO FEET.
NO. 2, FROM TO FEET.
NO. 3, FROM TO FEET.
NO. 4, FROM TO FEET.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	24#	New	291	Baker	=	=	Surface
4-1/2"	9.50#	New	3865	Baker	=	3811-3829	Oil

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	306	200	B-J	=	=
6-3/4"	4-1/2"	3879	1450	B-J	=	=

RECORD OF PRODUCTION AND STIMULATION

(RECORD THE PROCESS USED, NO. OF QTS. OR GALS. USED, INTERVAL TREATED OR SHOT.)

Perforated 4-1/2" csg. from 3811-3829 w/ 2 bullets per foot. Acidized perforations 3811-3829
w/500 gallons reg. acid, average injection rate 3 BPM. Fraced perforations 3811-3829
w/ 15,000 gallons refined oil & 22,500# sand. Average injection pressure 3,000#, average
injection rate 23.8 BPM.

RESULT OF PRODUCTION STIMULATION