


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

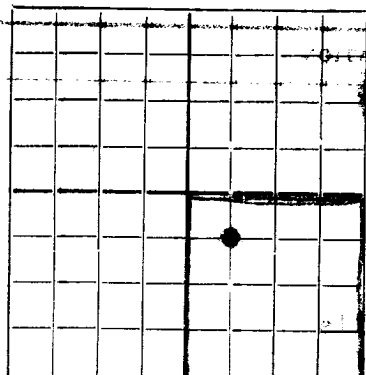

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (D) SUBMIT IN TRIPLICATE.

Gulf Oil Corporation Of Pennsylvania

J. F. Janda B

Company or Operator

Lease

Well No.

1 in NE SE

of Sec.

32

T.

215

R. 36E, N. M. P. M., EUNICE Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of NE SE

If State land the oil and gas lease is No. 1-233 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Of Pennsylvania Address Tulsa, Oklahoma

Drilling commenced Jan. 18th, 1936 Drilling was completed Mar. 7th, 1936

Name of drilling contractor Milhean Address Tulsa, Oklahoma

Elevation above sea level at top of casing 8204 feet.

The information given is to be kept confidential until 1938

OIL SANDS OR ZONES

No. 1, from 3745 to 3908 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary hole to feet.

No. 2, from to feet.

No. 2, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	40	8	Lapweld	380	?			
7-5/8	26	8	Lapweld	1572	?			
5-1/2	17	10	Lapweld	3777	?			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15-5/4	10-3/4	380	250	Halliburton		
9-7/8	7-5/8	1572	300	"		
8-5/4	5-1/2	3777	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3908 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing March 7th, 1936, 19

The production of the first 24 hours was 250 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours 225,000 Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in. ?

EMPLOYEES

?, Driller

, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 27th

Tulsa, Oklahoma March 27th, 1936

day of March, 1936

Name J. F. Janda

Position General Superintendent

Representing Gulf Oil Corporation Of Pa.

Company or Operator

Address Tulsa, Oklahoma.

Notary Public.

My Commission expires March 16, 1940

DUPLICATE

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	58'		Surface - red rock
	287		Sand - shale and red rock
	350		Broken sand and red rock
	385		Red Rock
	960		Red Rock anhydrite and shells
	1082		Shale - red rock and shells
	1081		Broken anhydrite and red rock
	1155		Red rock - sand - shells
	1165		Broken lime and sand
	1185		Red Rock and shells
	1228		Red Rock and shells
	1334		Red Rock and Anhydrite
	1377		Red Rock and shells
	1414		Anhydrite and shale
	1441		Red Rock
	1465		Red Rock and Anhydrite
	1495		Broken lime, shale and red rock
	1500		Red Rock
	1598		Anhydrite
	1761		Salt
	1888		Salt and Anhydrite
	1970		Salt and Anhydrite
	2235		Salt
	2452		Salt - Anhydrite
	2572		Salt
	2622		Salt - broken anhydrite
	2705		Salt - Anhydrite shells
	2820		Salt
	2870		Anhydrite
	2990		Salt - shells
	3038		Salt
	3560		Lime
	3745		Brown Lime
	3908		Upper San Andres