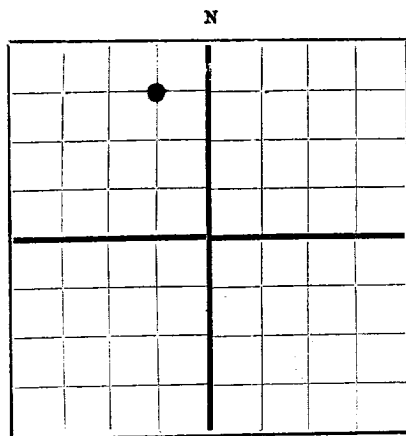


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

E. G. Rodman **Box 591, Odessa, Texas**
Company or Operator Address
Atlantic-Currie Well No. **1** in **NE 1/4 NE 1/4** of Sec. **7**, T. **21S**
Lease
R. **37E**, N. M. P. M., **Hardy** Field, **Lea** County.
Well is **660** feet south of the North line and **3300** feet west of the East line of **Sec 7-21S-37E**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **Mae F. Curry** Address **Canice, N. M.**
If Government land the permittee is Address
The Lessee is **C. F. Hedrick** Address **Midland, Texas**
Drilling commenced **6-25-49** 19 Drilling was completed **8-15-49** 19
Name of drilling contractor **Cactus Drilling Company** Address **San Angelo, Texas**
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **3650** to **3659** feet **Small show oil**
No. 2, from **3742** to **3756** feet **Small show oil**
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10-3/4	40	8	Nat'l	203'	Reg.				Shut off water
7"	20	8	"	3510	Float Shoe				Oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2"	10-3/4	203'	100	Halliburton		50 Sacks
8-3/4	7"	3510'	250	"		150 Sacks

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5"	185'	Nitro-glycerin	630 qt.	7-28-49	3790	

Results of shooting or chemical treatment **Increase gas from 500,000 to 3,400,000 cu. ft.**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **2-26-** **149**
The production of the first 24 hours was barrels of fluid of which **100** % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours **3,400,000** Gallons gasoline per 1,000 cu. ft. of gas **.028**
Rock pressure, lbs. per sq. in. **840**

EMPLOYEES

C. F. Stewart Driller **B. E. Nestor** Driller
C. E. Hinehart Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **29th**day of **August**, **1949**

Notary Public

Odessa, Texas **August 29, 1949**Name **E. G. Rodman**Position **Owner**

Representing

Company or Operator

My Commission expires **June 1, 1951**Address **Box 591, Odessa, Texas**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
00	125	125	Caliche and Sand
125	225	100	Sand and Red Bed (Run 203' of 10-3/4" Pipe)
225	800	575	Red Rock
800	986	186	Red Bed and Shale
986	1255	269	Sand and Red Rock
1255	1595	340	Red Bed and Anhydrite
1595	2345	750	Anhydrite and Salt
2345	2464	119	Anhydrite and Potash
2464	2680	216	Anhydrite
2680	2701	21	Anhydrite and Gyp
2701	2757	56	Anhydrite
2757	2830	73	Anhydrite and Gyp
2830	2955	125	Anhydrite
2955	2969	14	Gyp
2969	3235	266	Anhydrite
3235	3284	49	Anhydrite and Lime
3284	3358	74	Anhydrite
3358	3388	30	Lime and Anhydrite
3388	3486	98	Anhydrite
3486	3510	24	Lime (Run 3510' of 7" O.D. Pipe & Cemented) (Drilled 100' Cement)
3510	3885	375	Lime
3885			Total Depth Plugged back from 3885' to 3805' with pea gravel and drove 5' steel cuttings 5' lead wool - filled with gravel to 3790'.