
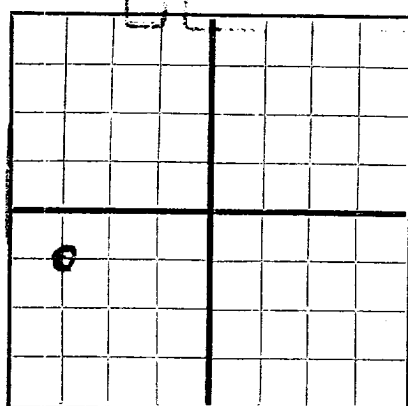


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Markham, Cone & Redfern 1st Nat'l Bldg., Lubbock, Texas
Eubanks Company or Operator
Well No. 2 in NW/4 SW/4 of Sec. 14, T. 21
R. 37 Lease Drinkard Field, Lea County.
Well is 1980' feet south of the North line and 660' feet west of the East line of section 14
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is O. R. Eubanks Address: Eunice, New Mexico
If Government land the permittee is Address:
The Lessee is Markham, Cone & Redfern Address: Lubbock, Texas
Drilling commenced 4-18-49 19 Drilling was completed 5-27-49 19
Name of drilling contractor Tri-Service Drilling Co., Address: Box 722, Midland, Texas
Elevation above sea level at top of casing 3412' feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 6400 to 6622 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8	48#	8	Nat'l	242	Halliburton	to top			Surface pipe
8 5/8	32#	8	Nat'l	2791	"				Intermediate
5 1/2	15.5#	8	"	6567	"				oil string

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
16 3/4	13 3/8	242	200	Halliburton	33	
9 3/4	8 5/8	2791	1200	"	33	
7 3/4	5 1/2	6567	500	"	33	

PLUGS AND ADAPTERS

Heaving plug—Material Halliburton shoe and plug Length 30' Depth Set 6567
Adapters — Material Size 5 1/2

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		20% acid	500 gal	5-28-49	6567 to 6622	

Results of shooting or chemical treatment.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6622 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to producing May 28 19 49.
The production of the first 24 hours was 158 barrels of fluid of which 98.7% was oil; .10% emulsion; and % water; and .2% sediment. Gravity, Be. 40
If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 30th day of May 1949 at Lubbock, Texas
Name Markham, Cone and Redfern
Position partner
Blower Levenchurger

